

# 2N



## 2N Indoor View

### Indoor station with a 7" touch display

The 2N Indoor View unit looks at home in even the most luxurious of penthouse apartments! It's advanced too - it offers widescreen HD video calls, can integrate with smart home systems, and supports video surveillance. Install it inside the wall, on the wall, or on a stand.

#### 7" HD TOUCHSCREEN

Your customer will appreciate how easy it is to operate the unit on the large display. The home screen even provides the current weather forecast.

#### STYLISH DESIGN

A luxury penthouse deserves a great looking unit. Offer the 2N Indoor View to ensure you win your project.

#### VIDEO SURVEILLANCE

The resident can see what is going on in places where no intercom has been installed, and there is only an IP camera (e.g., a hallway, yard or garage).

#### FULL SCREEN VIDEO CALLS

We've enlarged the video call preview. This means residents can even read a courier's name tag with ease. Wide screen calls will be compatible only with some 2N intercoms.

#### FIRST CONFIGURATION FROM YOUR OFFICE

Save time and money. You can set up all the units in a project remotely without the need to travel to the installation site.

#### RESIDENTS' PRIVACY IN SAFE HANDS

The 2N Indoor View runs on our very own operating system. We've made sure that no one can listen in or record residents' conversations.





#### SMART HOME INTEGRATION

The resident can turn on the air-conditioning, lighting or call the lift directly from the display on their unit. The unit can send up to 3 different HTTP commands.

#### GREAT FOR RETROFIT PROJECTS

In addition to the classic Ethernet version, we also offer a Wi-Fi variant which is great for adding all these advanced features to places without network cabling.

## Variants

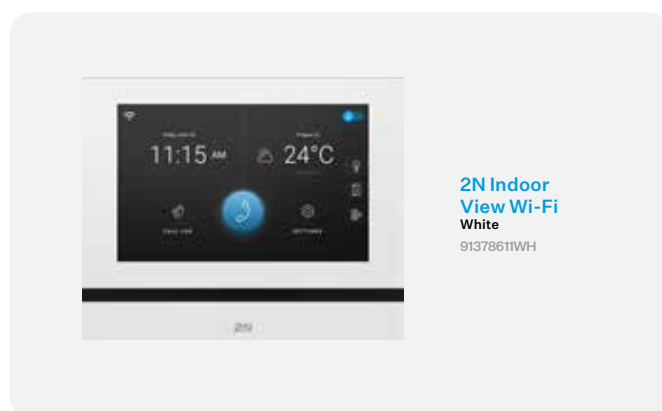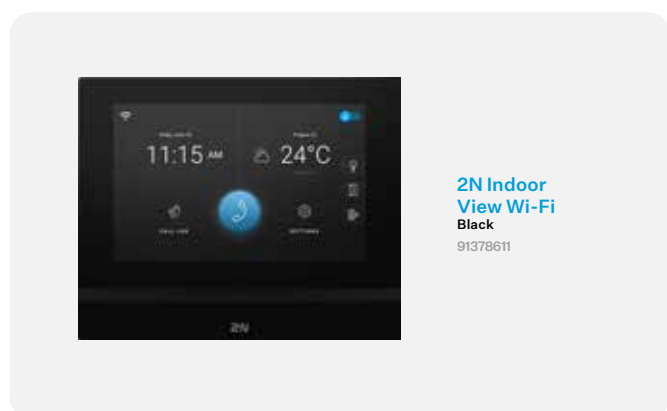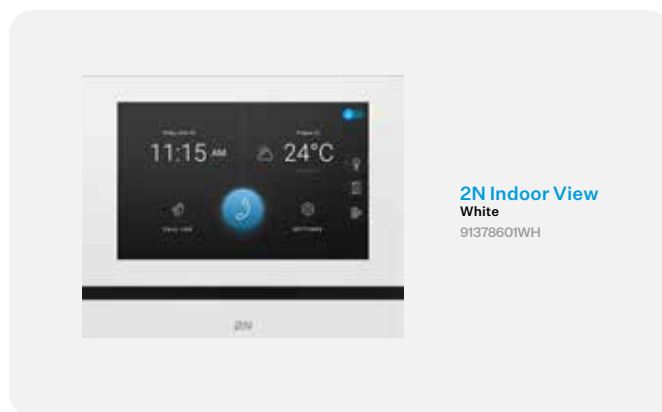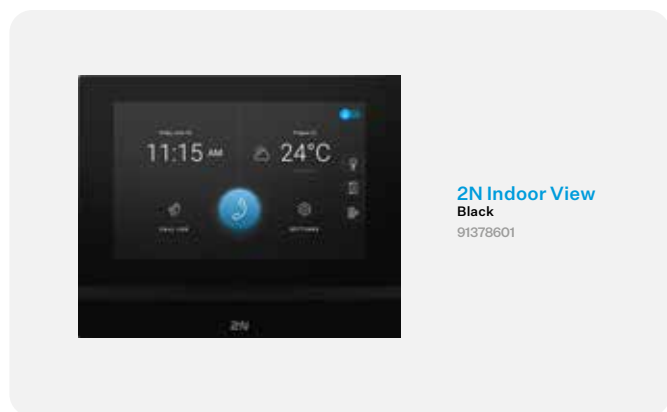

## Technical Parameters

### Power Supply

Type	12V DC adapter or PoE 802.3af
Recommended power supply	12V/1A
Reverse polarity protection	yes

### User Interface

Controls	capacitive touch panel
Display size	7"
Resolution	1024x600px

### Audio

Microphone	integrated
Speaker	integrated, 2W
Induction loop output	600mV RMS
Codecs	G.711a/u, G.722, G.729, L16/16 kHz

### Video

Codecs	H.264
--------	-------

### Interface

LAN	10/100BaseT, RJ-45
Recommended cabling	Cat5e or higher

### Wi-Fi (optional)

Frequency	2.4GHz and 5GHz
Standard	802.11n and 802.11ac
Antenna	in-built
Important	Wi-Fi and ethernet cannot be used simultaneously

### Doorbell Input

Input type	switching contact (button/relay)
Contact type	normally open (NO)
Contact parameters	up to 50V/5mA, DC

### Mechanical Parameters

Dimensions (W x H x D)	193x157x50mm
Weight	555g
Operating temperature	0 to 50°C
Relative operating humidity	10 to 90% (non-condensing)
Storage temperature	-20 to 70°C
Recommended altitude	0 to 2000m

### Warranty

5-years warranty see [https://www.2n.com/en\\_GB/support/warranty-and-repairs](https://www.2n.com/en_GB/support/warranty-and-repairs)

2N TELEKOMUNIKACE a.s.

Prague, Czech Republic | +420 261 301 500 | sales@2n.com

2N.com