

ATT. ZONE AMPLIFIER

PAM-510/520



ATT. ZONE AMPLIFIER



OVERVIEW

PAM-510/520 is a PA amplifier which is possible to control the output each speaker zone using an Attenuator. It can broadcast in selected zones or all zones using 5 speaker selection switches and one ALL switch and is easy to check output signal since it has a built-in monitor speaker. Emergency broadcasting is available in sync with a fire receiver and power On/Off is possible at a distance via dry contact method. Also, it is convenient to use at a distance by connecting with remote amplifier(RM-05A) and optional tuner, CD, wireless MIC, etc. are available according to user environment.

FEATURES

ATT. Zone Amplifier

It has a built-in attenuator, which controls output each speaker zone

Various options

Optional tuner, CD, wireless MIC are available according to user environment.

Remote Control System

It is possible to be connected to the remote amplifier and broadcast in selected zones via remote amplifier.

Speaker Selection Switch


It can broadcast in selected zones or all zones using 5 speaker selection switches and one ALL switch.

MIC Priority Broadcasting

It is designed to block broadcasting from other sound sources when broadcasting MIC1 because MIC1 has priority broadcasting.

Monitor Speaker

It is easy to check output signal using a built-in monitor speaker.



Building, station, etc.



Hall, Church



Kindergarten



Amusement Park

SPECIAL FEATURES



Output	MIN	2	3	4	5	MAX
Output Voltage	6V	8.9V	12.5V	25V	50V	100V

MONITOR SPEAKER Input and Option Module Installation

It is easy to check output signal of PAM-510/520 as it is equipped with three step volume MONITOR SPEAKER module, PAM-MPM4(CD/MP3/TUNER) are available at the user's need. It can be used after MONITOR SPEAKER is removed.



DC 24 V Emergency Power and Remote Control Power

PAM-510 is installed with Battery Connection Terminal for emergency cases. Also, Remote Power Switch Connection Terminal is provided for the use in OFF status.



Emergency Broadcasting when Exterior Contact Signal Inserted

When Exterior Contact Signal inserted in EM Terminal, "It is Emergency Situation" goes on air from equipped VOICE IC through 5CH Speaker Line simultaneously.

MIC Priority Broadcasting

With PROPRITY SWITCH, it can block broadcasting from other sound sources when broadcasting Channel 1 and 2.

* CHIME input can adjust the amount of mute with interior Muting LEVEL VOLUME.

REMOTE MIC

Can be connected to REMOTE MIC(RM-05A) and broadcast remotely.

SUMMARY

SOURCES(OPTION)

MPM4(CD/USB/DRP/TUNER), REMOTE MIC

BUILT-IN FUNCTIONS

120 W/AC,DC/OUTPUT ATTENUATOR/MONITOR SPEAKER/CHIME/SIREN/SPEAKER SELECTION SWITCH/EQ VOLUME/MIC PRRIORITY BROADCASTING

CONNECTIVITY FEATURES


MIC/LINE INPUT 4CH/SPEAKER OUTPUT 5CH/REMOTE MIC/REMOTE CONTROL/TELL-IN/NIGHT RINGER

FRONT AND REAR PANEL FUNCTION

- | | | |
|--|-------------------------|---------------------------|
| 1 Monitor speaker | 5 CHIME S/W and VOLUME | 9 Main volume controller |
| 2 Speaker selection and output controller | 6 SIREN S/W and VOLUME | 10 Power switch |
| 3 Channel 1~6 tone controller and PEAK LED | 7 TEL IN VOLUME | 11 LED Protection circuit |
| 4 Channel volume controller | 8 RINGER S/W and VOLUME | 12 LED Output level |



- | | | |
|---|--|--|
| 1 Speaker contact terminal | 7 PHANTOM POWER (Condenser mic power switch) | 12 Remote power terminal |
| 2 NIGHT RINGER terminal | 8 MIC 1 PRIORITY(Priority Mute) switch | 13 Remote control input terminal(option) |
| 3 TEL IN terminal | 9 Input size controller(TRIM VR) | 14 Main amplifier input jack |
| 4 CHIME(External chime switch) terminal | 10 AC INLET(AC Power input) | 15 External output jack |
| 5 EM(EMERGENCY) terminal | 11 DC TERMINAL(DC power input) | 16 Line input 1~2 |
| 6 Antenna terminal(TUNER option) | | 17 Mic input 1~4 |

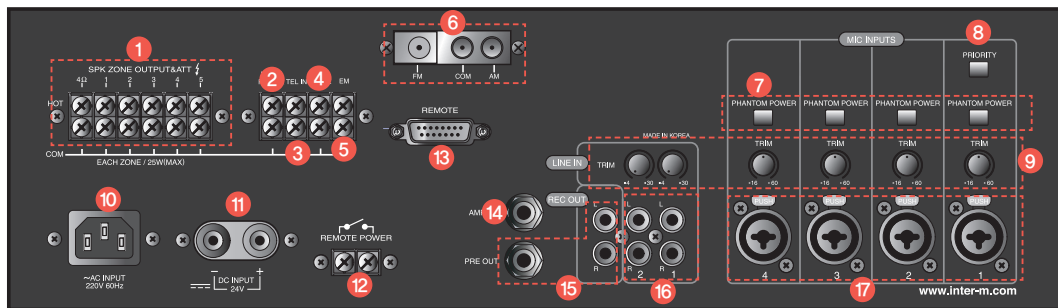

APPLICATIONS

Remote Mic

- * Broadcasting alarm sound and MIC TALK function
- * Broadcasting zone selection function
- * Output level meta
- * MIC broadcasting
- * CHIME output removal function




Related module



SPECIFICATIONS

	PAM-510	PAM-520
Amplifier Section (Amp In@1 kHz, 4 Ω Load Output)		
Rated Output Power (THD 1%)	120 W(RMS)	240 W(RMS)
Speaker Zone 1~5 Output	25 W MAX	50 W MAX
Input Sensitivity/Impedance	1 V/20 kΩ	
S/N	Better than 85 dB	
Frequency Response (at 1 kHz Half Power Output, ±3 dB)	80 Hz~18 kHz	
Mic Input Section (Mic 1~4 In@1 kHz, Preamp Out)		
Input Sensitivity/Impedance	-60 dBV/600 Ω	
S/N	Better than 55 dB	
Frequency Response(±3 dB)	120 Hz~10 kHz	
Tone Control (Bass:100 Hz,Treble:10 kHz)	±12 dB	
Phantom Power	+24 V DC	
Line Input Section (Line 1~2 In@1 kHz, Preamp Out)		
Input Sensitivity/Impedance	-30 dBV/10 kΩ	
S/N	Better than 65 dB	
Frequency Response (±3 dB)	80 Hz-15 kHz	
Tone Control (Bass:100 Hz,Treble:10 kHz)	±12 dB	
Remote Amp Section (Remote In@1 kHz, Preamp Out)		
Mic Input Sensitivity/Impedance	-60 dBV/600 Ω	
S/N	Better than 55 dB	
Frequency Response (±3 dB)	120 Hz~10 kHz	
Tel In Section (Tel In@1 kHz, Preamp Out)		
Input Sensitivity/Impedance	0.3 V/600 Ω (USA/Canada)/ 0.775 V/600 Ω (EC & Associated)	
S/N	Better than 65 dB	
Frequency Response (±3 dB)	330 Hz~3 kHz	
Pre Amp Out(Mic 1~4, Line 1~2, Tel In, Remote In)	0 dBV/600 Ω	
THD	Less than 0.5 %	
Record Out	-10 dBV/3 kΩ	
Operation Temperature	-10 °C~40 °C	
Power Source	100-120 VAC or 220-240 VAC; 50/60 Hz, 24 VDC	
Power Consumption	180 W	320 W
Weight	17 kg/37.6 lbs	19 kg/42 lbs
Dimensions	482(W)×132(H)×398(D)mm/19(W)×5.2(H)×15.7(D) in	

Connecting Equipment

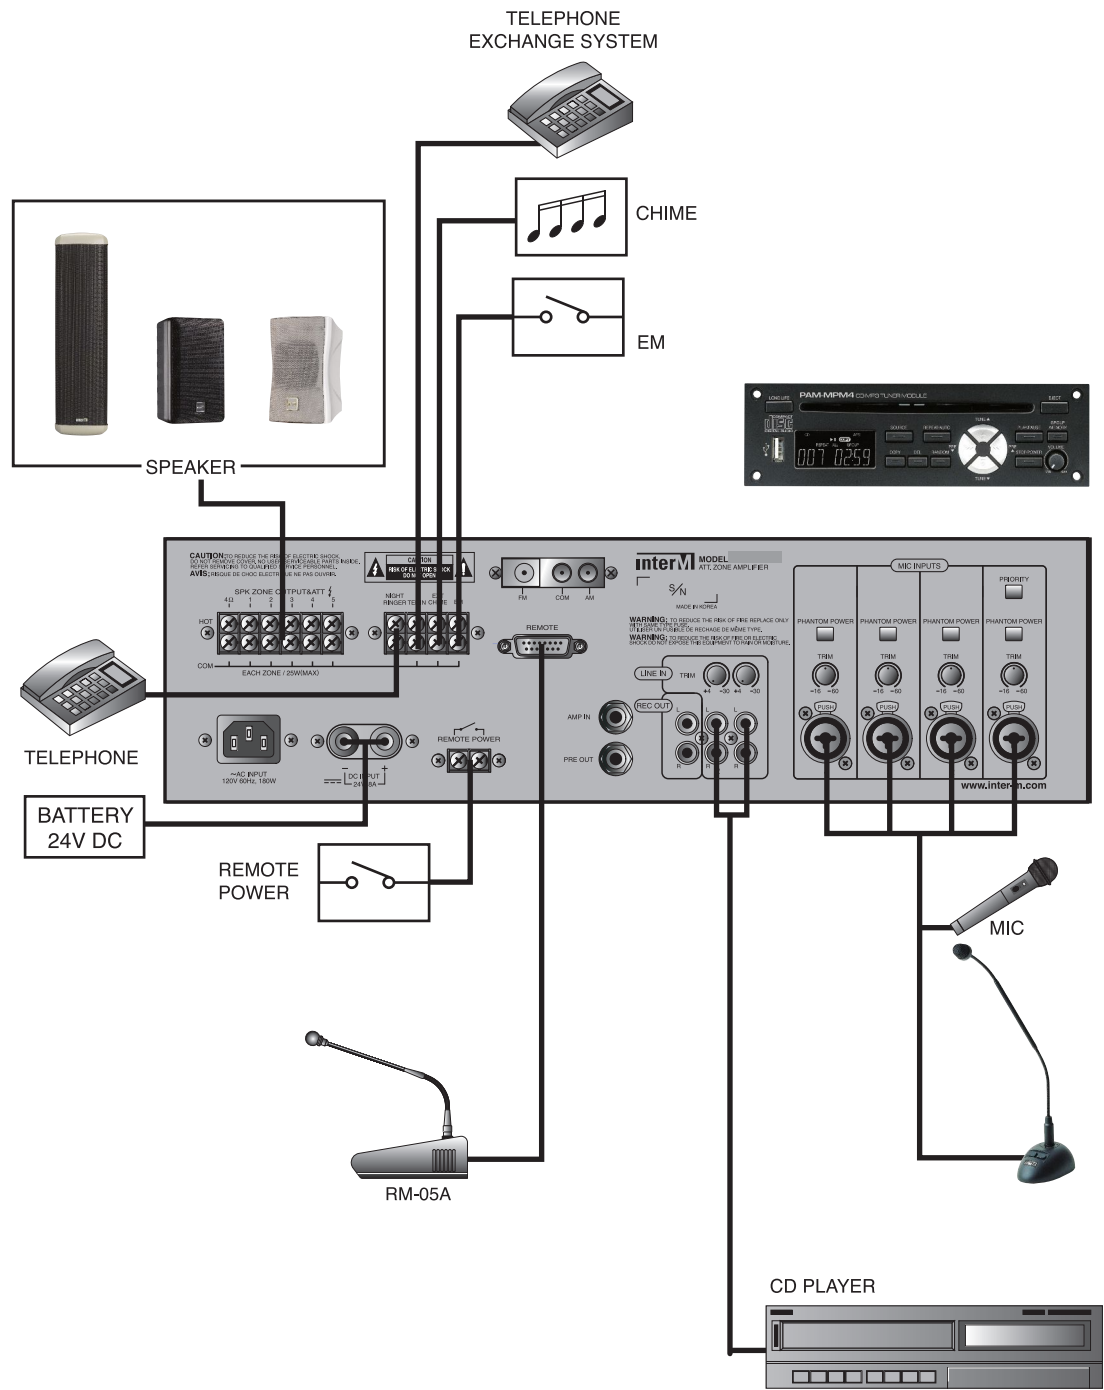

PAM Option CD MP3 Tuner Module



〈PAM-MPM4〉



〈PAM-MPM4 INSTALLED in PAM-510〉

Adapted System: PAM-340A/480A, PAM-510
Source : CD/USB/DRP (Digital Recording Player : SD Memory)/TUNER

- **CD Long-Life Function**
When LONG LIFE Function is implemented and CD 1 is stopped, contents in the CD are automatically saved in Interior Memory(DRP). These contents are actually the ones that are played, so CD MECHA-NISM's Pick-up Life Span extends.
- **USB Hosting Function**
With USB, direct play of the music, DRP and two-way COPY are available.
- **Frequency Memory of 40 TURNERS**
It can memorize 40 frequency of the broadcasting station.

SPECIFICATION	
Frequency Response	20 Hz~20 kHz ±1.5 dB
THD + N(WITH A FILTER)	0.08 %(LESS THAN 0.1 %)
S/N Ratio(WITH A FILTER)	80 dB(MORE THAN 75 dB)
Output Signal Level	1.2 V ±0.2 V
Capacity of inner memory	2 GByte
Range of receipt frequency	FM: 87.5~108 MHz
Operating temperature	-10 ℃~40 ℃
Power Source	DC 17 V,22 V
Weight(SET)	950 g/2.1 lbs
Dimensions(SET)	184(W)×55(H)×180(D) mm/7.2(W)×2.2(H)×7.1(D) in

REMOTE MIC



Adaptation System : PAM-340A/480A, PAM-510/520

- RM-05A is a Remote Control Amplifier exclusively for PAM-510/520.

- Broadcasting within selected region is available with 5 Speaker Selection Key and it outputs Microphone Broadcasting Chime

- Chime sending is optional and high-quality broadcasting is available with high-speed Condenser Microphone.

- Control Circuit : 5CH



- Communication Connectors : 15pin D-SUB CONNECTOR(including power)

- Major Features :

1) Contact and Microphone Broadcasting	2) Built in CHIME	3) Output Level Meter
4) Extension of circuit impossible	5) Can be used within 300m	

SPECIFICATION	
Output Level/Impedance	1 V±200 mV(max gain)/600 Ω, BAL
MIC Input Sensitivity/Impedance	0.8 mV/±0.3 mV/600 Ω, BAL
Frequency Response	120 Hz~18 kHz, ±3 dB
T.H.D	Less than 0.7 %
S/N	Better than 55 dB
Speaker Control Terminal & Switch	5CH
Power Source	DC 24 V (used by D-Sub connector)
Weight (SET)	800 g/1.8 lbs
Dimensions (SET)	194(W)×60(H)×205(D) mm/7.6(W)×2.4(H)×8.1(D) in


CONNECTIVITY

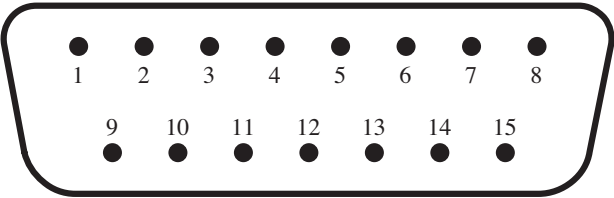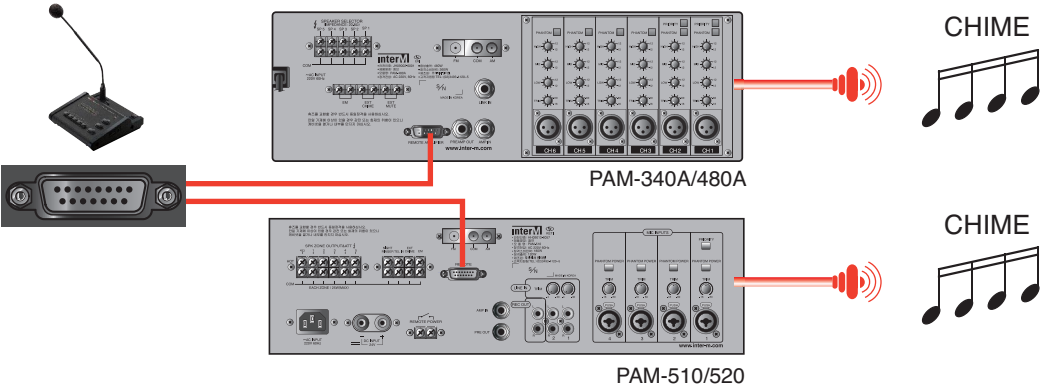

15P D-SUB JACK	
Pin 1 : Remote Amplifier Input HOT(+)	Pin 8 : Remote Control 5(SP 5)
Pin 2 : Remote Amplifier Input COLD	Pin 9 : Remote Control GND
Pin 3 : SIGNAL GND Pin 10 : +24V	Pin 10 : +24V
Pin 4 : Remote Control 1(SP 1)	Pin 11 : CHIME Input
Pin 5 : Remote Control 2(SP 2)	Pin 12 : NC
Pin 6 : Remote Control 3(SP 3)	Pin 13 : NC
Pin 7 : Remote Control 4(SP 4)	Pin 14, 15 : NC

SPECIFICATION

- 1 Level Meter
- 2 Circuit Selection Button 5ea
- 3 Chime/Talk, All Selection Button

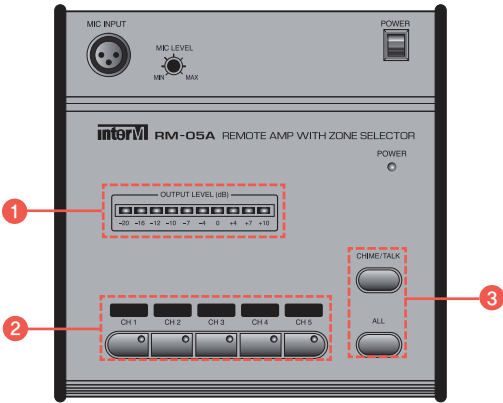



Inter-M Corp. (IMK)



719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com

※ Design and specification are subject to be changed for the improvement of product quality without pre notice.

2015. 10. V4