

1 x 4 HDMI V1.2 Splitter with CEC and multi-channels

Operation Manual



CHDMI-4M

Introduction


This is a high performance 1 to 4 HDMI with multi-channels distribution amplifier. It allows one HDMI source to connect up to 4 HDMI displays with multi-channels output simultaneously.

Features

1. Built-in EDID simulator and HDCP keyset allows each output to work independently in connecting to a HDMI display.
2. Splits a HDMI source up to 4 outputs without loss.
3. Supports DVI source and DVI display by using HDMI to/from DVI adaptor cable.
4. Supports a wide range of PC and HDTV resolutions from VGA to UXGA and 480p to 1080p.
6. Each of the buffered output can run up to 25 meters @1080p.
7. Supports multi-channels output from each independent HDMI ports.


Operation Controls and Functions

Front Panel

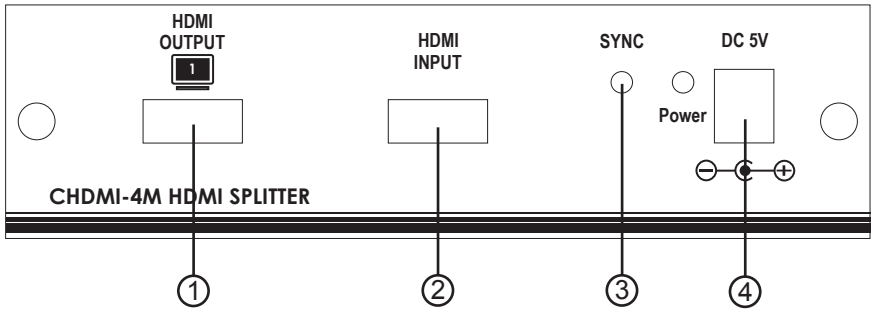

1. HDMI output 1: Connects to the HDMI input of your first display.
2. HDMI input: Connects to the HDMI or DVI output of your source equipment such as DVD player or Set-Top-Box.
3. Sync Led: The LED will illuminate when the HDMI source signal is connected to the input and is detected by the unit.
4. Power input: Plug the supplied 5VDC power supply into the unit. The LED will illuminate when connected.

Rear Panel

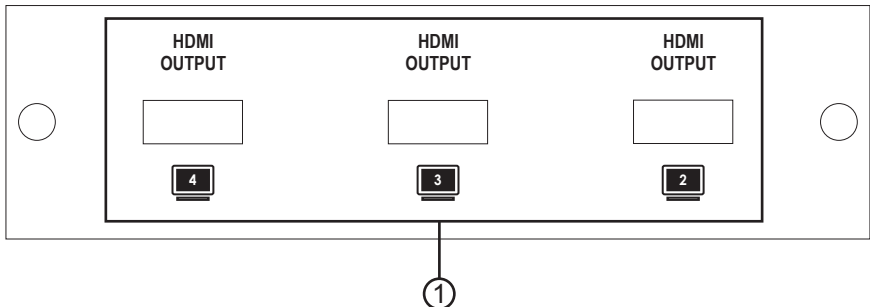


1. HDMI output 2/3/4: Connects each of these output ports to the HDMI input of a HDMI display.

Specifications

- **Input port** : 1 x HDMI female port
- **Output ports** : 4 x HDMI female port
- **Power Supply** : 5V/2.6A DC (US/EU standards, CE/FCC/UL certified)
- **Dimensions (mm)** : 102(W) x141(D) x 38(H)
- **Weight (g)** : 550
- **Chassis Material** : Metal
- **Silk Skin Color** : Black
- **Operating temperature range** : 0° ~ 48° C

Connection and Installation

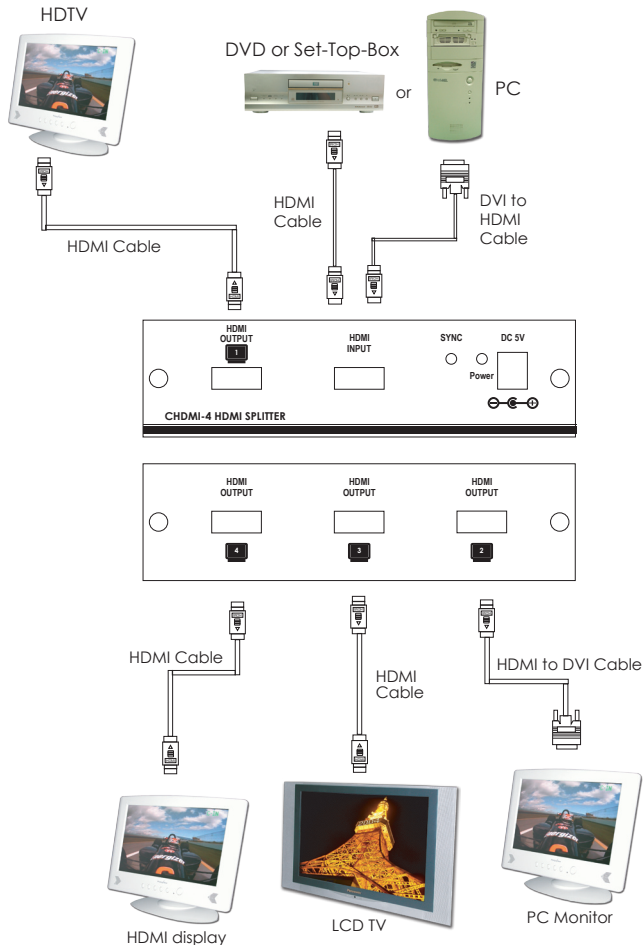



CYPRESS TECHNOLOGY CO., LTD.
Home page: <http://www.cypress.com.tw>