

• PA935N: 35W Mixer Amplifier

The PA935N is a 35 watt compact, desktop mixer amplifier ideal for use in smaller installations such as waiting rooms, office, factories, educational and retail applications.



Features Telephone Paging Input. Provides clear voice and full range background music.

Features:

- Compact design
- 1 Mic input (1/4" jack)
- 2 Mic/AUX switchable (1/4" jack/stereo phono)
- Priority inputs, telephone, Mic 1
- Bass/treble control
- 100v/70v loudspeaker output
- 8 Ω /4 Ω Low Z output option
- Optional 19" rack kit (BKT-PA935A)



19" Rack Mount Bracket
Option: BKT-935A Bracket

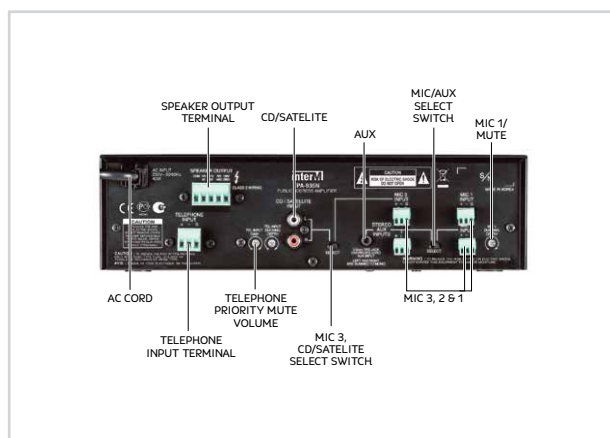

Specifications:

Model:	PA935N
Output Power	35W RMS @ 100v/70v 35W RMS 8 Ω /4 Ω
Inputs	1 x Mic (1/4" jack) 1 x Mic/Aux (1/4" jack) 1 x Mic/Aux ~ Sat (1/4" jack and stereo phono) 1 x screw terminal
Priority	Telephone, Mic 1
Input Sensitivity/Impedance	Mic 1,2,3 ~ -50dB/600 Ω Aux ~ -15dB/10k Ω Sat ~ 0dB/10k Ω Telephone ~ 0.775v/600 Ω
Frequency Response	80Hz ~ 15kHz
Power Requirement	230v AC, 50Hz
Rack Height	2U
Dimensions	290(W) x 76(H) x 185(D) mm
Weight	4.4kg