

Program Distributor

PO-6106



Program Distributor

PO-6106



- **EASY TO OPERATE**
 - Distributes a single channel input to six outputs.
- **EASY LEVEL ADJUSTMENT**
 - Front-panel input and output level adjustment.
- **INPUT MONITORING**
 - Input peak LED monitoring.

FRONT/REAR PANEL



- 1 INPUT PEAK INDICATOR
- 2 OUTPUT INDICATORS
- 3 POWER INDICATOR


- 4 INPUT LEVEL CONTROL
- 5 OUTPUT LEVEL CONTROL
- 6 POWER SWITCH




- 1 LINE INPUT
- 2 LINE OUTPUTS 1-6

- 3 AC POWER INPUT
- 4 DC POWER INPUT

APPLICATIONS

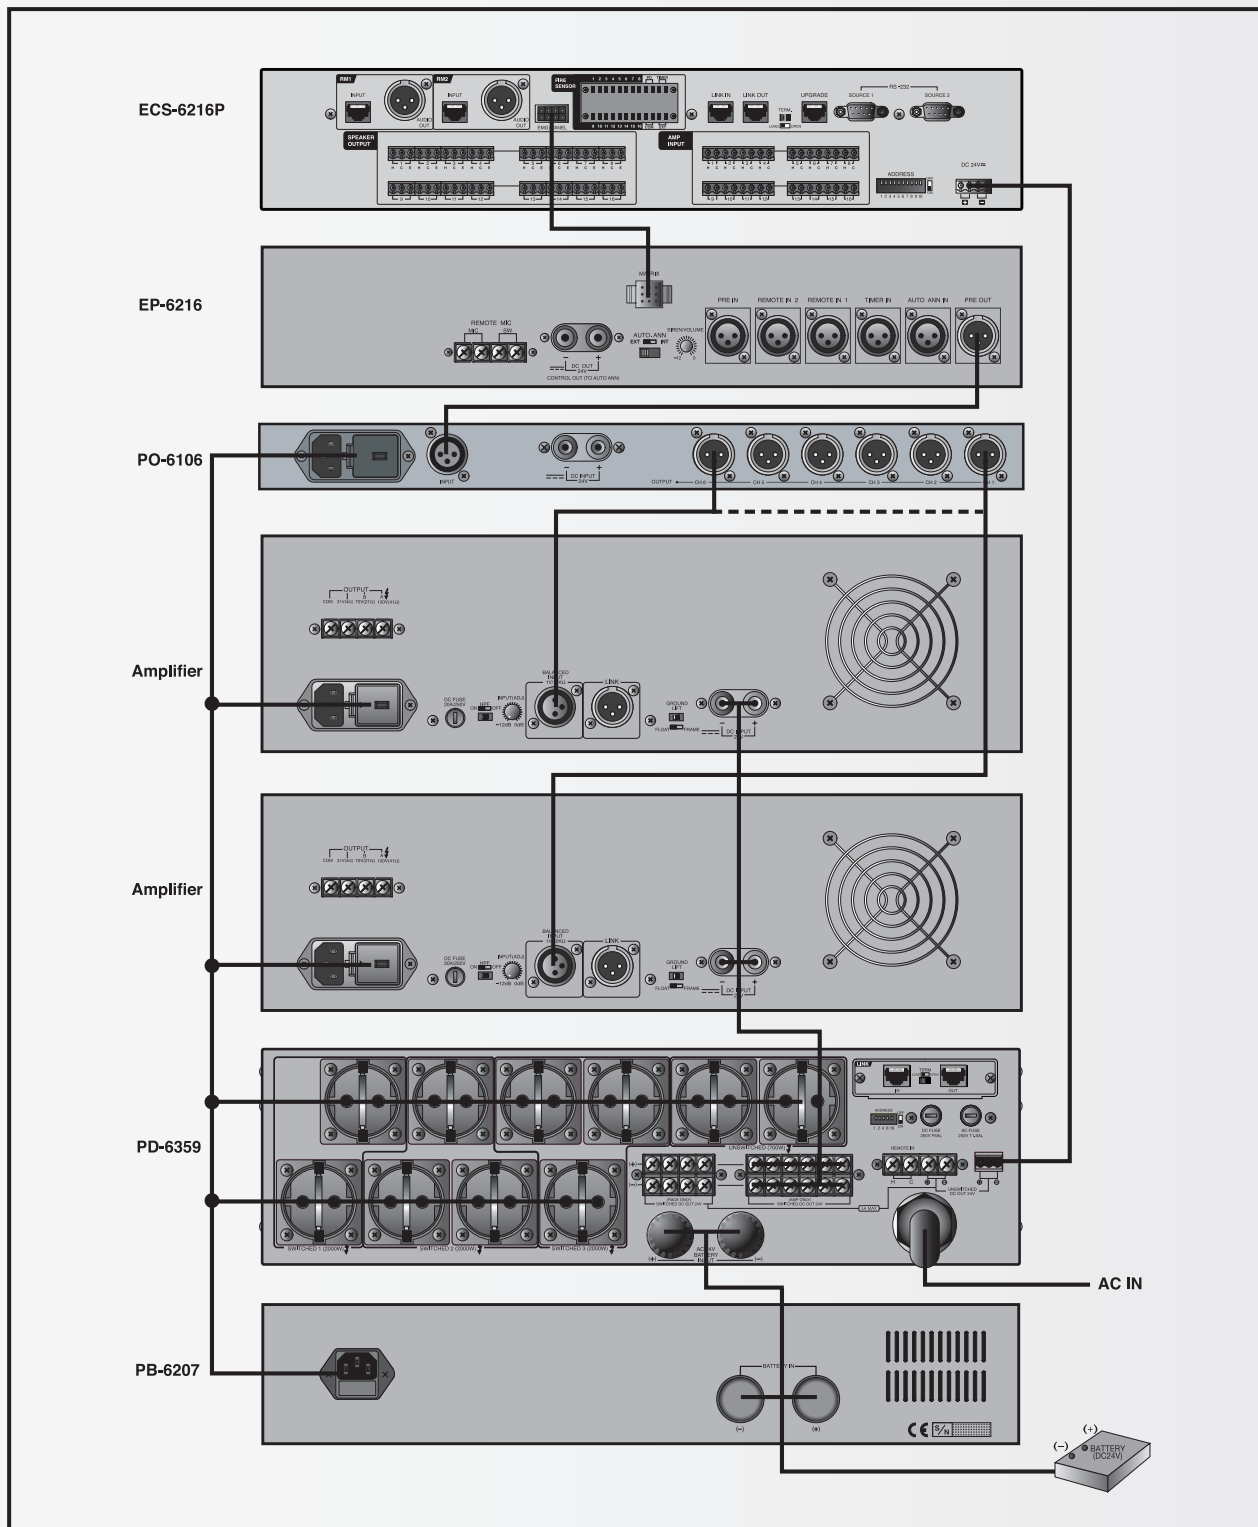


BLOCK DIAGRAM

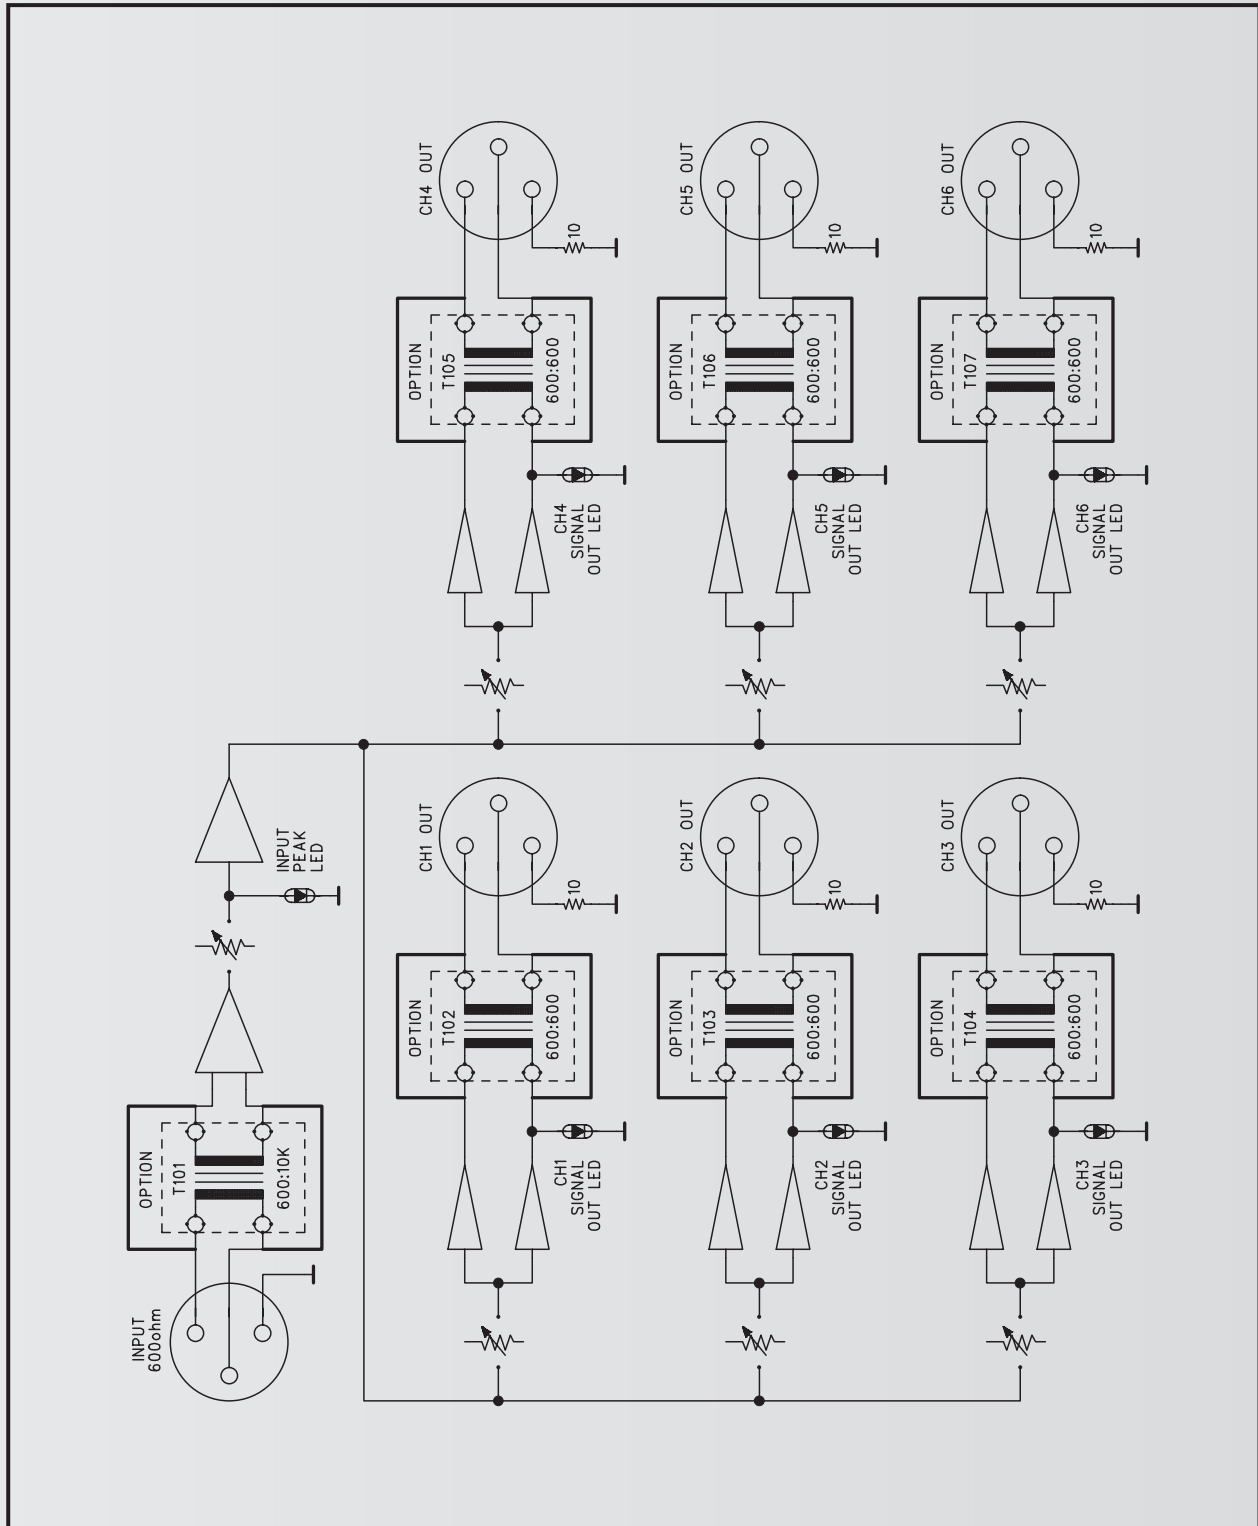

SPECIFICATIONS

	PO-6106
Channels	1 Input, 6 Outputs
Frequency Response	20Hz-20kHz (± 3 dB)
T.H.D at 1kHz, Rated Output	Less than 0.1%
Input Sensitivity/Impedance	3V $\pm$ 0.5V Balanced
Output Level/Impedance	1V $\pm$ 0.2V Balanced
S/N	Better than -95dB
Operation Temperature	-10°C ~ +40°C / 14°F ~ 104°F
Power Source	100–120VAC or 220–240VAC; 50/60Hz, DC 24V (Supplied AC main transformer depends on country requirements)
Power Consumption	8W
Weight (SET)	4kg/8.8lb
Dimensions (SET)	482(W)xx44(H)x280(D)mm/19(W)x1.7(H)x11(D)in

DIMENSIONS

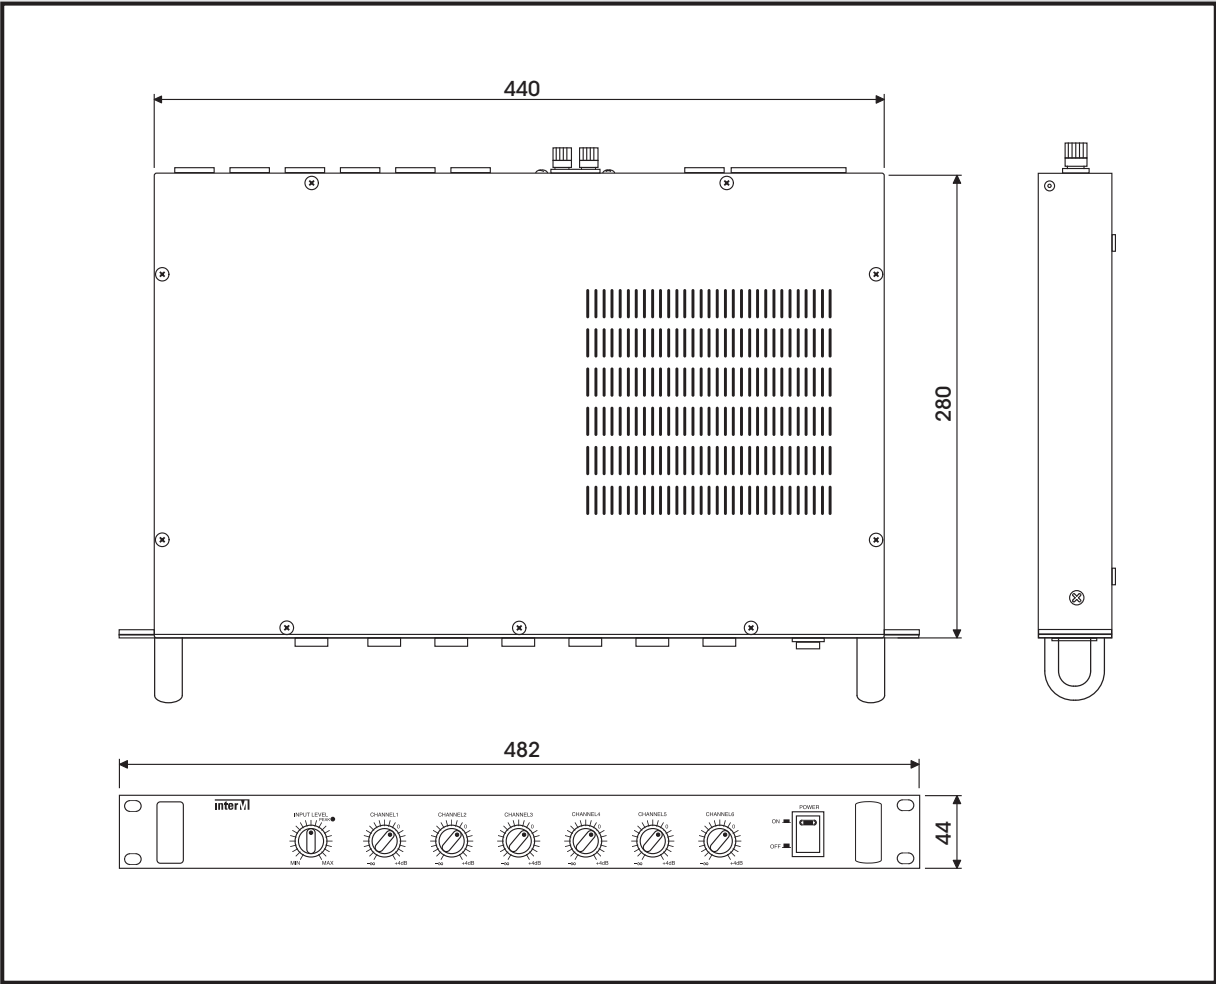



Bringing
technology
to life.

CIE-Group Ltd 3 Widdowson Close Blenheim Ind Est Bulwell Nottingham NG6 8WB England
T: +44(0)115 9770075 F: +44(0)115 9770081 E: info@cie-group.com W: www.cie-group.com

Registered in England No. 2761780

@ciegroup CIE-Group facebook.com/ciegroup



FS 31532