


• **CHDD-41AR: 4-to-1 Component Switcher**

The CHDD-41AR HD/SD switcher is designed for switching between various HD and SD sources for sharing one TV display.

Simply by pressing a button on the remote control you can select your desired HD/SD source for display on the TV monitor.

**Features:**

- Component/Composite Switcher
- Ideal for home theatre and presentation application
- High bandwidth performance 650MHz at -3dB
- IR remote control
- Easy to install and operate; plug and play solution gets to work immediately
- CHDD-41AR can be controlled either through input selection button on the front panel or using included infrared control
- RS-232 interface allows control from a distant device
- Supports HDTV high resolution: 480i, 576i, 576p, 720p, 1080i and 1080p
- Supports audio formats: S/PDIF (digital) and L/R (analog)

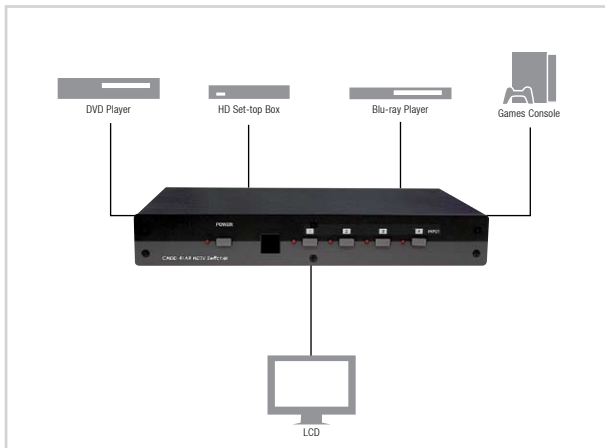

**Specifications:**

<b>Model:</b>	<b>CHDD-41AR</b>
<b>Inputs</b>	4 sets - 3 x RCA + 2 x RCA Stereo Audio + 1 x RCA (S/PDIF)
<b>Outputs</b>	1 set - 3 x RCA + 2 x RCA Stereo Audio + 1 x RCA (S/PDIF)
<b>Power</b>	5v DC/2A
<b>Dimensions</b>	292(W) x 47.5(H) x 176(D) mm
<b>Weight</b>	1.7kg