

• **ML1/K: Counter Induction Loop System**

The ML1/K counter induction loop amplifier is ideal for use in post offices, banks, building societies, ticket offices and reception areas.

Mountable on a standard UK 25mm double gang back box, it can generate a loop listening field of approximately 1 to 1.5 metres and includes one microphone input, one balanced line level audio input and indicators for input peak, mains on and loop strength.

A number of easy to adjust user and engineer controls are also provided.


Microphone and loop cable are supplied as part of the kit.

**Features:**

- Attractive, compact design blends with any decor
- Ideal for banks, post offices, small meeting rooms, reception desks, ticket booths and any other application requiring restricted or small area coverage
- Requires no specialist audio experience or connectors - can be fitted by any competent electrician
- Space-saving double-gang wall-mounting amplifier fits standard UK 25mm back boxes (requires fixed mains wiring)
- Omni-directional AMT microphone (supplied) plugs directly into 3.5mm socket on the amplifier's front
- Line/outreach socket also provided (max. 3 outreach plates per system)
- User-adjustable mic. sensitivity and engineer adjustable loop drive and input level controls



Typical ML1/K counter/ticket booth application:

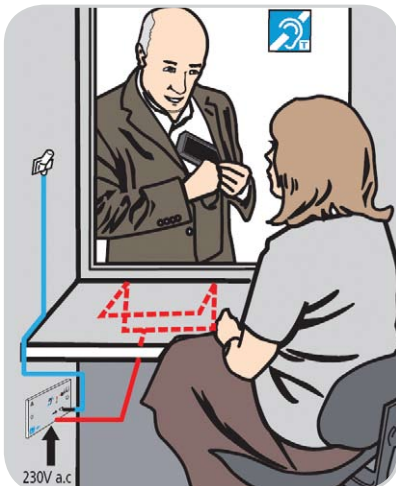

**Specifications:**

Model:	ML1/K
Type	Wall mounting (requires fixed mains wiring and a 25mm back box)
Coverage	1.2m <sup>2</sup> approx.
Inputs 1kHz	1 x 3.5 mm remote mic. socket; 1 x Line/Outreach socket
Indicators	Input level; power on; loop drive meter
Controls	On/off button; adjust auto-shut off timer
Kit Content	ML1 amplifier; AMT microphone; TX2 pre-formed counter loop; 'AFILS fitted' sticker
Dimensions	143(W) x 83(H) x 32(D) mm
Weight	0.3kg (amplifier only)