


• **PO6106:** 120W Mixer Amplifier

The **Inter-M PO6106** is a **Line Level Distributor** which allows the distribution of a **line level** audio signal to six separate outputs.

The **PO6106** ensures no loss of signal when using **multiple amplifiers** in larger industrial systems, supports the distribution of line level signals over long distances and/or to multiple destinations.

**Features:**

- 1 input (XLR)
- 6 Outputs (XLR)
- LED output signal LEDs
- Independent level controls of input/output
- 230v AC/24v DC powered
- 1U high, 19" rack mounting

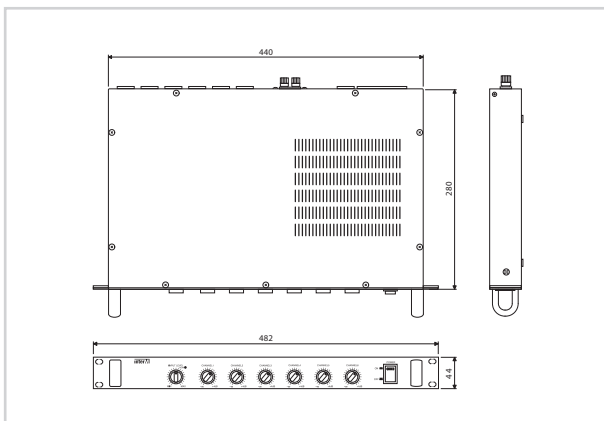

**Specifications:**

<b>Model:</b>	<b>PO6106</b>
Input	1 Variable Level ~ XLR
Outputs	6 x Variable Level ~ XLR
Input Level/Impedance	1v/600Ω Balanced
Output Level/Impedance	1v/600Ω Balanced
Frequency Response	20Hz ~ 20kHz
Power Requirement	230v AC, 50Hz, 24v DC
Dimensions	482(W) x 44(H) x 280(D) mm
Weight (Net)	4.00kg
Weight (Gross)	6.05kg