


• **AU-11DD: v1.3 HDMI Audio De-Embedder (5.1) with built-in repeater**

The CYP AU-11DD is a compact Dolby Digital Downmixer, developed to decode and downmix Dolby digital audio signals to stereo.

Featuring Digital Coax, Toslink Optical and L/R Analogue audio outputs, all audio out signals of the AU-11DD are consecutively 'live', supporting use in multi-room audio applications where digital and analogue devices are employed.

**Features:**

- Embedded Dolby Digital Decoder technology for Digital downmixing
- Supports Dolby Digital, Analogue Stereo, & LPCM Stereo signals
- Integrated digital interpolator filter and Digital-to-Analogue Converter (DAC)
- Integrated Analogue-to-Digital Converter (ADC)
- Supports Dolby Digital audio downmixing to 2-Channel Stereo audio
- Supports Dolby Digital sampling rate 48kHz
- Supports LPCM input sampling rates from 32 to 96kHz
- Output sampling rate is adjusted to 48kHz
- Provides electromagnetic-noise-free transmission
- Supports simultaneous outputs for added signal management flexibility, where Digital outputs maintain the Dolby Digital signal

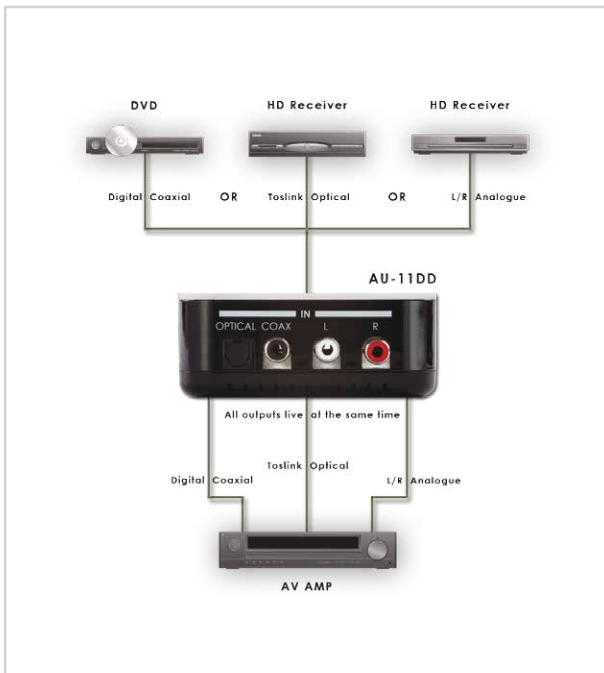

**Specifications:**

<b>Model:</b>	<b>AU-11DD</b>
<b>Inputs</b>	2x RCA (1x Analogue Stereo (L/R)) 1x RCA (1x Coaxial Dolby Digital / 2 Channel LPCM) 1x Toslink (1x Optical Dolby Digital / 2 Channel LPCM)
<b>Outputs</b>	2x RCA (1x Analogue Stereo (L/R)) 1x RCA (1x Coaxial Dolby Digital / 2 Channel LPCM) 1x Toslink (1x Optical Dolby Digital / 2 Channel LPCM)
<b>PSU</b>	5v / 1.2
<b>Dimensions</b>	95(W) x 35(H) x 85(D) mm
<b>Net Weight</b>	100g