


Digital Audio Converter with Stereo Headphone Output (DAC)



The AU-D3-H is designed to convert either Coaxial or Optical signals from a digital stereo signal to analogue stereo audio and output via a 3.5mm Headphone connection. This product features an integrated headphone amplifier and is capable of supporting audio sampling rates up to 192kHz for enhancing sound reproduction.

FEATURES

- Digital Audio to Stereo Headphone Audio Converter (DAC) with 192kHz support for enhanced sound reproduction
- Integrated digital interpolator filter
- Supports digital audio signal (Coaxial/Toslink) input and analogue headphone output (3.5mm socket)
- Accepts uncompressed digital stereo audio input
- Accepts 16 or 24bit: 44.1, 48, 88.2, 96, 176.4 and 192kHz sample rates
- Built in 200mW Capless Headphone Amp

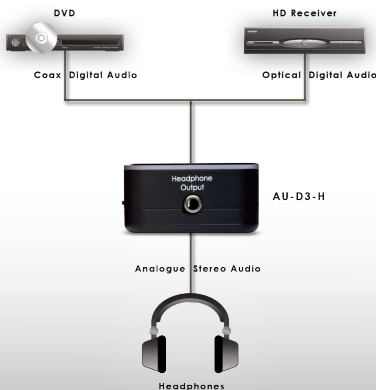

SPECIFICATIONS

Input:	1x RCA (1x Coaxial, 2 Channel LPCM) 1x Toslink (1x Optical, 2 Channel LPCM)
Output:	1x Stereo mini-jack (1x Headphone)
Power:	5V/1.2A DC (US/EU standards, CE/FCC/ UL certified)
Dimensions:	50mm (W) x 55mm (D) x 25mm (H)
Gross Weight:	170g
Net. Weight:	160g
Packaging:	Retail Blister Pack

