

CLOCKAUDIO

C006E
BOUNDARY
LAYER
PROFESSIONAL
MICROPHONE

MINI MIC

Small, light, sensitive and designed for a wide range of Pro Audio applications including conference, lectern and theatre.





- Boundary layer condenser microphone
- Half Cardioid Polar Pattern
- Low profile
- Stone Grey Nextel finish

CLOCKAUDIO

C006E BOUNDARY LAYER PROFESSIONAL MICROPHONE

SPECIFICATIONS

TYPE	Condenser (back electret)
POLAR PATTERN	Half Cardioid
FREQUENCY RESPONSE	50 Hz - 18 KHz
SENSITIVITY	-48 dB +/- 3 dB @ 1 KHz (0 dB = 1 V/Pa)
IMPEDANCE	200 Ohms
S/N RATIO	64 dB(A)
MAXIMUM SPL	120 dB 1% THD
POWER REQUIREMENTS	9 - 48 volts phantom power
SWITCHABLE BASS FILTER	-4 dB per octave at 400 Hz to -6 dB per octave at 100 Hz
SWITCHABLE PAD	-10 dB
CABLE	3 metres
TERMINATION	XLR
DIMENSIONS	39mm x 16.4mm
FINISH	Stone Grey Nextel

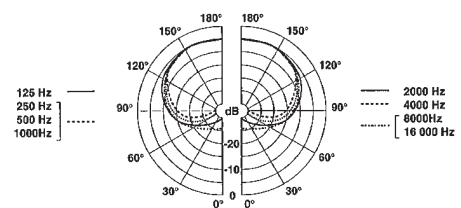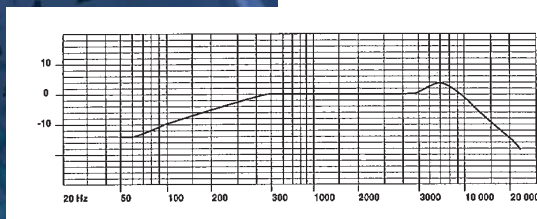

CLOCKAUDIO®

Clockaudio Ltd - Headquarters

22 Amside Road, Waterlooville, Hampshire PO7 7UR, UK
Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
e-mail sales@clockaudio.co.uk

Clockaudio North America Inc.

2891 du Meunier, Unit 103, Vaudreuil-Dorion, Quebec J7V 8P2, Canada
Tel: (450) 424-9797 • Fax: (450) 424-3660
e-mail: info@clockaudio.com

www.clockaudio.com

PROFESSIONAL
MICROPHONE
SYSTEMS

As part of a continuous product improvement programme, we reserve the right to alter specifications without prior notice.