


Wiring configuration 4 core + screen cable

Mic A---Phase + (Hot) Red wire
Phase - (cold) Black wire

Mic B---Phase + (Hot) Yellow wire
Phase - (Cold) White wire

*Ground Common for both mic capsules
using screen of cable*

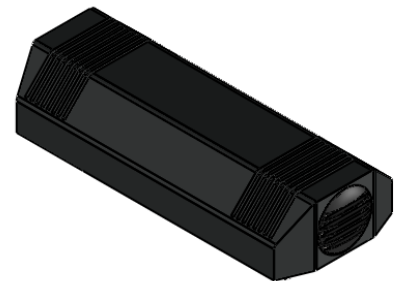

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CLOCKAUDIO LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CLOCKAUDIO LTD IS PROHIBITED.	CLIENT APPROVAL			NAME	DATE	CLOCKAUDIO
	NAME		DRAWN	C.BUDGEN	Jan 2012	
	COMPANY		MATERIAL	Brass		CS 2-RF
	DATE		FINISH	Black nextel or satin nickel		
	SIGNATURE		NOTES:	CS 2-RF (Black nextel) CS 2N-RF (Satin Nickel)		
	COMMENTS:					SIZE A DWG. NO. 890 REV.
			DO NOT SCALE DRAWING	SCALE:	WEIGHT:	SHEET 1 OF 1