

• **EL-5500-HBT: 8 x 4 HDBaseT / HDMI / VGA Presentation Switch**

EL-5500-HBT Advanced Presentation Switcher features 8 x various AV inputs and 4 x AV outputs to provide the user with flexibility and control of their presentation system using multiple format AV sources.

The CYP EL-5500HBT features 4 x HDMI Inputs, 2 x HDBaseT, 1 x Composite and 1 x VGA Inputs allowing for HD sources such as BluRay / DVD / Sky TV, non-HD sources such as PC / laptop, plus the ability to receive 2 x HDBaseT signals from CYP Transmitters.

The user can then choose from any one of the 8 connected various mixed media AV sources, which will be outputted to the EL-5500-HBT's 2 x HDMI, 1 x HDBaseT and 1 x HDMI bypass outputs.


Therefore, a wide variety of HD and non-HD sources can easily be integrated into a boardroom / classroom / presentation suite AV system and the user can quickly and simply switch to their choice of signal to be outputted to the various displays. For any non-HD sources connected, the Presentation Switcher will automatically scale the video signals for HDMI output.

Both digital and analogue stereo audio is supported via a built-in DAC (Digital to Analogue Converter) and ADC (Analogue to Digital Converter) providing flexible audio signal integration.

The CYP EL-5500-HBT Presentation Switch also features a switchable digital bypass output, allowing any HDMI or HDBaseT input signal to be directly bypassed via the 'third' HDMI bypass output.

Features:

- HDMI, HDCP, and DVI compliant
- Digital to Analogue & Analogue to Digital Audio conversion (DAC/ADC)
- Supported Resolutions : HDTV: 480i to 1080p PC: VGA to WUXGA
- Aspect Ratio Adjustment
- Motion Adaptive De-interlace (3D)
- Video Noise Reduction
- Underscan / Overscan Selection
- Picture Adjustment Settings
- HDBaseT Input/Outputs support PoE (Power over Ethernet) through to compatible connected receiver
- Independent HDMI bypass output (switching digital inputs only)
- Supports HDBaseT LAN Serving function
- Supports IR/RS-232/IP and front panel button control

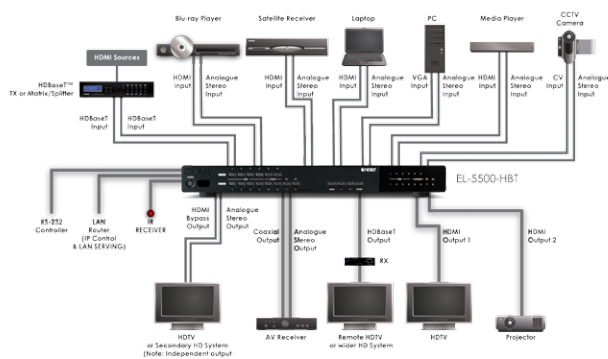

Specifications:

Model:	EL-5500-HBT
Inputs:	4x HDMI [4x HDMI Uncompressed AV and Data] 4x 3.5mm Stereo mini-jack [4x Analogue inputs for HDMI Stereo(L/R)] 2x RJ45 [2x HDBaseT HDMI & Proprietary Data] 1x 15pin Dsub [1x PC RGBHV] 1x 3.5mm Stereo mini-jack [1x Analogue input for PC Stereo(L/R)] 1x RCA [1x Composite] 2x RCA [1x Analogue input for Composite Stereo (L/R)] 1x RJ45 [1x LAN Serving] 1x 9pin Dsub [1x RS-232 Data] 1x 3.5mm Stereo mini-jack [1x Infra Red Receiver] 1x USB Type A [1x Service Port 1 Proprietary Data] 1x USB Mini B [1x Service Port 2 Proprietary Data] 1x 3.5mm Stereo mini-jack [1x Service Port 3 Proprietary Data]
Outputs:	2x HDMI [2x HDMI Uncompressed AV and Data] 1x RJ45 [1x HDBaseT HDMI & Proprietary Data] 1x RCA [1x Coaxial 2 Channel LPCM] 1x 3.5mm Stereo mini-jack [1x Analogue Stereo(L/R)] 1x HDMI [1x HDMI Bypass Uncompressed AV and Data] 1x 3.5mm Stereo mini-jack [1x Analogue Bypass Stereo(L/R)]
Dimensions:	440(W) x 50(H) x 260(D) mm
Net. Weight:	2800g