

- **PA6312:** 120W Power Amplifier
- **PA6336:** 360W Power Amplifier
- **PA6348:** 480W Power Amplifier

For installations which require pure power, the Inter-M PA6000 Series of power amplifiers are reliable, robust work horses.


Units can be mains or DC powered so can easily operate in a critical system or in event/hire applications using battery power.

Connections and controls are rear panel mounted to deter tampering or accidental adjustment.

Features:

- 120W/360W/480W Output power (100v and 4Ω* / 8Ω)
- Audio/line in - (3 pin XLR)
- Audio/line out - (3 pin XLR)
- Input level control (on rear)
- Ground lift and HPF switches
- Fan cooled
- Thermal protection circuit
- DC power terminals
- 3U high, 19" rack mounting

* PA6312 only has 4Ω low Z output.
PA6336 / PA6348 have 4Ω and 8Ω options.

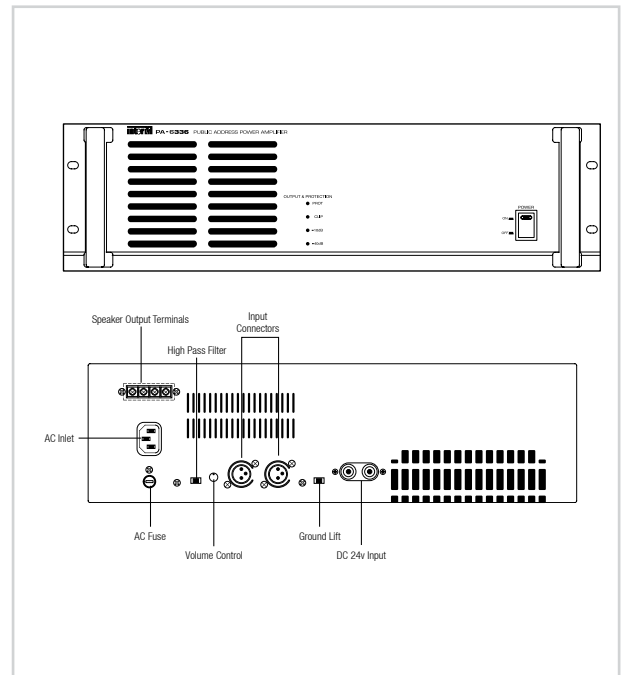

Specifications:

Model:	PA6312	PA6336	PA6348
Output Power	120W RMS @ 100v and 4Ω	360W RMS @ 100v and 4, 8Ω	480W RMS @ 100v and 4, 8Ω
Input Sensitivity/Impedance	1v/10kΩ	1v/10kΩ	1v/10kΩ
Output Sensitivity/Impedance	1v/10kΩ	1v/10kΩ	1v/10kΩ
Frequency Response	70Hz ~ 18kHz	70Hz ~ 18kHz	70Hz ~ 18kHz
Power Requirement	230v AC, 50Hz, 24v DC	230v AC, 50Hz, 24v DC	230v AC, 50Hz, 24v DC
Rack Height	3U	3U	3U
Dimensions	482(W) x 132(H) x 280(D) mm	482(W) x 132(H) x 280(D) mm	482(W) x 132(H) x 280(D) mm
Weight	14kg	21kg	22kg