


• PP6214: Mixer Pre-Amplifier

Two output pre-amplifier allowing any of the 10 input signals to be routed to either Output 1, Output 2 or both.

Ideal for dual zone applications in factories, leisure centres, hotels and general PA installations.

Features:

- 8 Mic inputs (XLR)
- 8 Line inputs (1/4" jack)
- 2 Stereo inputs (phono/1/4" jack)
- 2 Outputs (XLR)
- Phantom power (18v block switched)
- Record output (2 x 1/4" jack)
- Priority, mic 1, priority input 1, priority input 2
- 3 Band EQ per output
- Signal allocation per input channel
- 24v DC powered option
- 2U high, 19" rack mounting

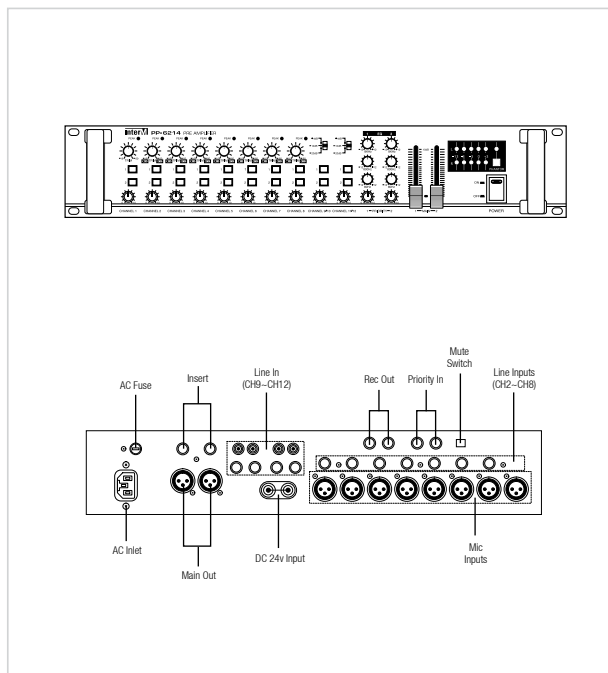

Specifications:

Model:	PP6214
Inputs	8 Mic (XLR) 8 Mono Line (1/4" Jack) 2 Stereo Line (2 x 1/4" Jack / 2 x Stereo Phono)
Input Sensitivity/Impedance	Mic: -60dB/600Ω Balanced Line: -30dB/10kΩ Balanced
Stereo	+4dB, -10dB, -20dB/10kΩ Unbalanced
Output Sensitivity/Impedance Master	+4dBm/600Ω Balanced
Rec Out	-6dB/10kΩ
Phantom Power	Mic: 1-8: 18v DC, Block Switched
Frequency Response	20Hz ~ 20kHz
Power Requirement	230v AC, 50Hz/24v DC
Rack Height	2U
Dimensions	482(W) x 88(H) x 280(D) mm
Weight	12.8kg