

Digital Audio over CAT6 Extender Set




The PU-304-KIT is designed to send digital audio signals over 150m over CAT5e/6 cable infrastructure. This device supports both Coaxial and Optical signals and can transmit these signals up to 150m. The PU-304-KIT can be powered using a USB cable or the supplied PSU adaptor for added flexibility in a compact design. Digital SPDIF signals are supported up to a sample rate of 96khz, and support for Stereo and Multichannel digital audio (LPCM, DTS, Dolby Digital, Dolby Digital Plus), is also provided.

FEATURES

- Supports Coaxial or Optical digital audio SPDIF signals.
- Supports Stereo and Multichannel digital audio (LPCM, DTS, Dolby Digital, Dolby Digital Plus).
- Supports sample rate up to 96kHz.
- Dual transmission 1 x Coaxial and 1 x Optical
- Signals can be extended over single CAT5e/CAT6 up to 150m

SPECIFICATIONS

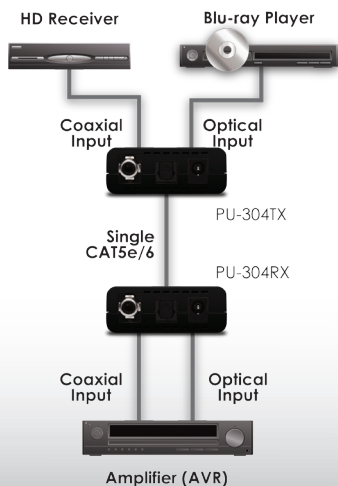

PU-304TX

Inputs
 1x RCA (1x Coaxial 2 Channel LPCM / DTS / Dolby Digital / Dolby Digital Plus)
 1x Toslink (1x Optical 2 Channel LPCM / DTS / Dolby Digital / Dolby Digital Plus)
Outputs
 1x RJ45 (1x Digital Audio Propriety Data)
Power:
 5V/1A DC (US/EU standards, CE/FCC/UL certified) or USB
Dimensions:
 55mm (W) x 85mm (D) x 22mm (H)
Net Weight:
 60g

PU-304RX

Inputs
 1x RJ45 (1x Digital Audio Propriety Data)
Outputs
 1x RCA (1x Coaxial 2 Channel LPCM / DTS / Dolby Digital / Dolby Digital Plus)
 1x Toslink (1x Optical 2 Channel LPCM / DTS / Dolby Digital / Dolby Digital Plus)
Power:
 5V/1A DC (US/EU standards, CE/FCC/UL certified) or USB
Dimensions:
 55mm (W) x 85mm (D) x 22mm (H)
Net Weight:
 1060g
Gross Weight:
 380g
Packaging:
 Boxed

