

PU-515PLTX-1H New Product


HDBaseT™ LITE Transmitter with simultaneous HDMI output (HDMI, IR & RS-232 with POE, up to 60m)



The PU-515PLTX-1H Transmitter allows uncompressed HDMI signals and to be transmitted over a Single CAT5e/6/7 cable. This device allows the distribution of Video, Audio, Power over Ethernet (PoE), RS-232 and 2-way IR control functionality over the same CAT5e/6/7 cable. These combined HDMI and control signals can be transmitted up to lengths of 60 metres. This variant of the PU-515PL-TX Transmitter has a simultaneous HDMI output enabling a local HDMI display to be connected whilst simultaneously distributing the signals over a single CAT5e/6/7 to a compatible HDBaseT Receiver.

FEATURES

- HDMI, HDCP, & DVI compliant
- Supports all v1.4 HDMI resolutions plus 4k.
- Supports uncompressed video/audio up to 10.2Gbps
- Simultaneous HDMI and CAT5e/6/7 outputs
- Supports wide range of PC resolutions from VGA to WUXGA and HDTV resolutions up to 4Kx2K (3840x2160@24/25/30Hz & 50/60 YUV_420 and 4096x2160@24Hz & 50/60 YUV_420)
- Supports LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio transmission (32-192kHz sample rate)
- Supports distances up to 60 meters through CAT5e/6/7 cables
- Supports 3D signals

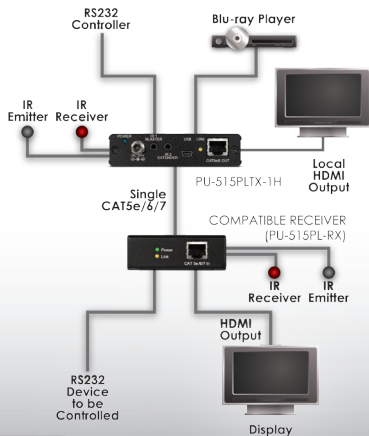

SPECIFICATIONS

Input:	1x HDMI (1x HDMI Uncompressed AV and Data) 1x 3.5mm Stereo mini-jack (1x RS-232) 1x 3.5mm Stereo mini-jack (1x Infra Red Receiver)
Output:	1x HDMI (1x HDMI Uncompressed AV and Data) 1x RJ45 (1x HDBaseT Lite HDMI & Propriety Data) 1x 3.5mm Stereo mini-jack (1x Infra Red Emitter)
Power:	24V/1.25A (US/EU standards, CE/FCC/UL certified)
Dimensions:	105mm (W) x 115mm (D) x 26mm (H)
Gross Weight:	660g
Net. Weight:	540g
Packaging:	Boxed

