



HDBase™ LITE Wall Plate Receiver with PoC & 2-way IR (up to 60m)



The PU-515PL-WPRX allows uncompressed HDMI signals, control and power to be transmitted over a Single CAT5e/6/7 cable. This device allows the distribution of Video, Audio, Power over Cable (PoC) and 2-way IR control functionality over the same CAT5e/6/7 cable. These combined HDMI and control signals can be transmitted up to lengths of 60 metres. This wall plate variant of the PU-515PL-RX receiver enables seamless integration into a standard double-gang back box.

FEATURES

- HDCP 2.2 Compliant
- Supports all v1.4 HDMI resolutions plus 4K
- Supports uncompressed video/audio up to 10.2Gbps
- Supports resolutions VGA~WUXGA, 480i~1080p, 4K UHD@24/25/30Hz (RGB 4:4:4 & YUV 4:2:2), 4K UHD@ 60Hz (YUV 4:2:0), 4K/2K@24/25/30Hz (RGB 4:4:4 & YUV 4:2:2) and 4K/2K@ 60Hz (YUV 4:2:0) dependent upon the output display's EDID settings
- HDMI, HDCP, & DVI compliant
- Uncompressed data transfer over single CAT cable (60m @ 1080p cat5e/6)
- Uncompressed video 1080p, 60Hz, 48bits
- Audio support up to 7.1CH & Dolby TrueHD, DTS-HD
- Supports: HDMI, PoC & Control (2-way IR)

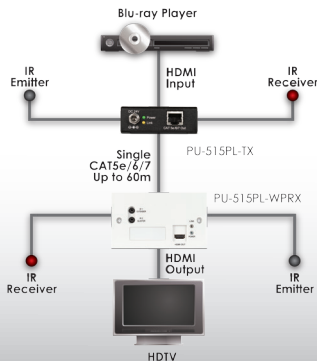

SPECIFICATIONS

Input:	1x RJ45 (1x HDMI & Propriety Data), 1x 3.5mm Stereo mini-jack (1x Infra Red Receiver)
Output:	1x HDMI (1x HDMI Uncompressed AV and Data), 1x 3.5mm Stereo mini-jack (1x Infra Red Emitter)
Power:	PoC
Dimensions:	145mm (W) x 40mm (D) x 85mm (H)
Gross Weight:	540g
Net. Weight:	360g
Packaging:	Boxed

