

### FEATURES

- High-quality EMINENCE woofer driver
- IMPALA Titanium compression driver
- 90°×60° constant directivity horn
- HF driver protection circuit
- 16 gauge powder coating steel grill
- Pole mount and rigging points (M8)×8
- optimized crossover design
- environmentally friendly high-density sound-absorbing material
- Enclosure designed for cluster installation

### APPLICATIONS

- Live Stage
- House of Worship
- Cultural and Sports Facilities
- Restaurant
- Auditorium / Lecture Halls
- Pub / Club

### OVERVIEW

The SE-K series is a compact 2Way point source type loudspeaker that can be used in a variety of applications. With its wide and dynamic frequency response, the SE-K series loudspeaker accurately reproduces a wide range of frequency including a tight and powerful base.

The SE-K series speakers can be used as a main PA, as delay or fill boxes as well as program monitors.


The enclosure design features multiple rigging points for easy horizontal or vertical Array and installation convenience. The SE-K series is designed considering the requirement for quality sound at an economical price. For applications where extended low frequency is required, the SE-K series can be coupled with the matching CSB-K series subwoofer.



### SPECIFICATIONS

Type	2Way Passive Point Source
Frequency Range (-10dB)	45Hz ~ 20kHz
Rated Power (AES)	300W
Rated Power (Program)	600W
Rated Power (Peak)	1200W
Recommended Amplifier Power	600W
Sensitivity (1W/1m)	97dB SPL
Maximum SPL (Peak)	128dB SPL
Normal Dispersion (H/V)	90° H/60° V (Rotatable)
Nominal Impedance	8Ω
Transformer Taps (70V/100V)	-
Recommended High-Pass Filter	40Hz 12dB/Oct.
LF Driver	15" Vented Woofer (EMINENCE DG)
HF Driver	1.35" Titanium Compression (IMPALA)
Horn	90° H/60° V (Rotatable)
Enclosure Material	15T MDF
Grill	Black powder coated 16 gauge hexagon perforated steel, protection mesh backing/ Powder Coated Punching Metal
Connectors	1xSpekon NL4, 1xPush terminal
Fittings/Suspension	8xM8 inserts(2xtop, 2xbottom, 3xrear), PoleCup
Finish	Textured black RoHS compliant paint/ WATER-BORNE PAINTING
Color	BLACK
Weights (Net)	20.9kg/46.1lb
Dimensions (Net, WxHxD)	450x630x450mm (17.7x24.8x17.7in)
Optional Accessories	SB-30HA (Wall Bracket)


### FREQUENCY/IMPEDANCE RESPONSE

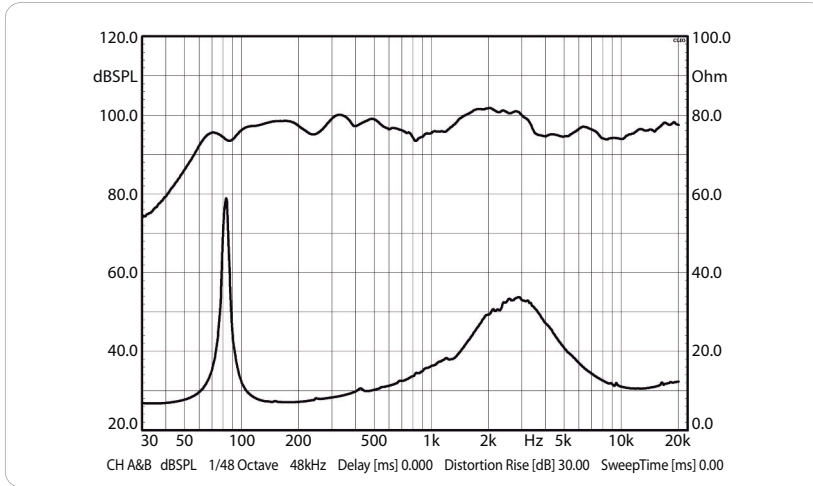

[SPL VS Freq]

[Imp VS Freq]

### DIMENSION

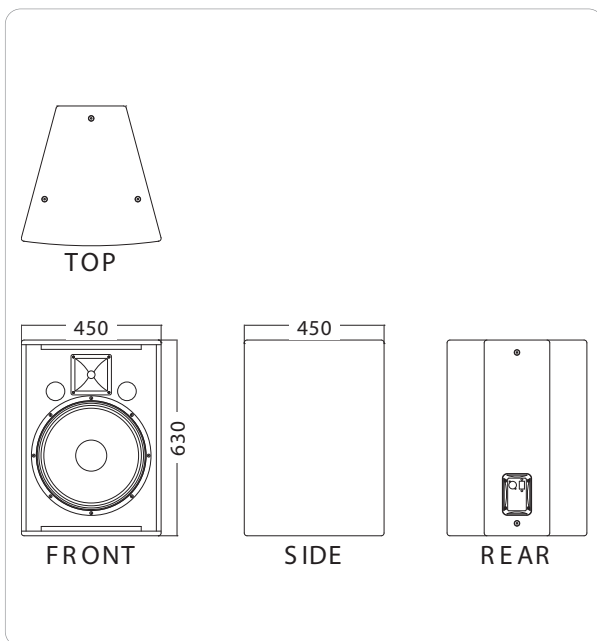

### POLAR PATTERN

