


• **PS-616: 100v Line Loudspeaker Selector**

The New Inter-M PS-616 Speaker Selector allows the selection of up to 16 individual Loudspeakers/zones fed by a 100v amplifier or 2 groups of 8 Loudspeakers fed by 2 separate amplifiers.

Loudspeakers/zones are selected using switches with built-in LED indicators or groups can be activated via voltage-free contacts on the rear.

**Features:**

- 16 Individual zones
- Timer and Remote LED indicators per channel
- Remote control of 2 x 8 groups via voltage-free contact
- 24v DC powered
- 1U high, 19" rack mounting

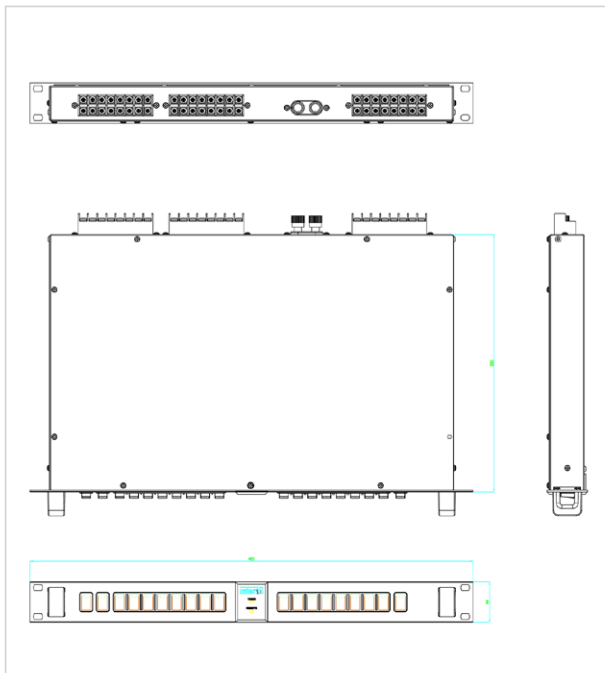

**Specifications:**

<b>Model:</b>	<b>PS9116</b>
Loudspeaker Zones	16 Channels, All, Group1, Group2
Remote Control	Voltage-free contact - screw terminal on rear
Power Requirement	24v DC
Dimensions	482(W) x 44(H) x 280(D) mm
Weight (Net)	3.60kg
Weight (Gross)	5.00kg