



- **A60:** 60W Mixer Amplifier
- **A120:** 120W Mixer Amplifier

This simple, economical desktop amplifier series provides a cost effective solution to basic PA and background music applications.

A60/A120 amplifiers are extensively used throughout the UK's leading high street and supermarket retail outlets.

Features:

- Clean, functional design
- 3 Mic inputs (combi XLR / ¼" jack)
- 2 AUX inputs (stereo phono)
- Bass and treble control
- Priority input ~ Mic 1
- Phoenix screw terminals for loudspeaker connection
- 2U high
- Optional 19" rack (BKT-A120)
(Also fits A60 Amplifier)

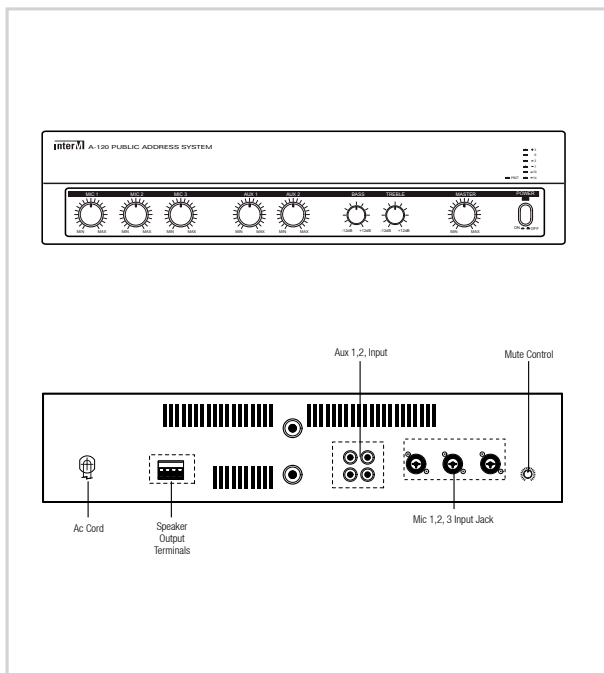

Specifications:

Model:	A60	A120
Output Power	60W RMS @ 100v 60W RMS @ 4Ω	120W RMS @ 100v 120W RMS @ 4Ω
Inputs	3 x Mic (combi ¼" XLR) 2 x Aux (stereo phono)	3 x Mic (combi ¼" XLR) 2 x Aux (stereo phono)
Priority	Mic 1	Mic 1
Input Sensitivity/Impedance	Mic: 1,2,3 ~ -60dB/600Ω Aux: -10dB/10kΩ unbalanced	Mic: 1,2,3 ~ -60dB/600Ω Aux: -10dB/10kΩ unbalanced
Frequency Response	80Hz ~ 16kHz	80Hz ~ 16kHz
Power Requirement	230v AC 50Hz	230v AC 50Hz
Rack Height	2U	2U
Dimensions	420(W) x 88(H) x 320(D) mm	420(W) x 88(H) x 320(D) mm
Weight	8.9kg	10.3kg