

• **AU-A50: Integrated 2-Channel (2x 30W) Zone Amplifier**


The AU-A50 is a compact 2 x 30W compact zone amplifier which is ideal for providing high quality sound reinforcement into remote AV zones within a multi-zone commercial AV system or multi-room domestic application.

This advanced amplifier solution from CYP supports integration of both digital and analogue audio signals from multiple sources (via optical, RCA, coax and mini-jack inputs). In domestic AV systems, this will allow for an audio output from a TV, enabling improved stereo sound reinforcement within an individual zone.

Using Ethernet connectivity to the rear of the AUA50 amplifier, it supports remote control via RS-232 or IP (Web Gui or Telnet).

Features:

- 30W per channel digital stereo Amplifier
- Control via remote control, RS-232 or IP (Web GUI or Telnet)
- Single zone amplifier
- LCD Display
- Compact design for remote in-zone application

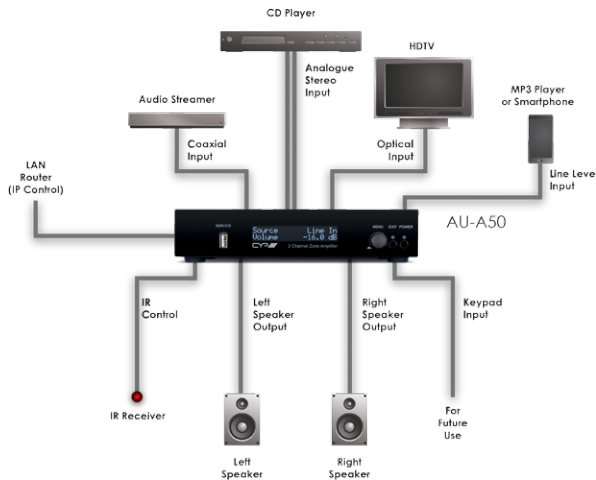

Specifications:

Model:	AU-A50
Inputs:	1x RCA [1x Coaxial 2 Channel LPCM] 1x Toslink [1x Optical 2 Channel LPCM] 2x RCA [1x Analogue Stereo (L/R)] 1x 3.5mm Stereo mini-jack [1x Analogue Stereo(L/R)] 1x RJ45 [1x IP Control] 1x RJ45 [1x Keypad - Reversed for future use - Propriety Data] 1x 3.5mm Stereo mini-jack [1x Infra Red Receiver] 1x USB Type A [1x Service Port Propriety Data]
Outputs:	4x Speaker Binding Posts [1x Speaker Level Stereo Output]
Output Power	30W per channel
Number of Channels	2
Power Supply	24v DC
Dimensions:	215(W) x 50(H) x 150(D) mm
Net. Weight:	3020g