

• **MA106: 60W Compact Mixer Amplifier**



The MA106 is a highly compact 60 watt 100v line/low impedance switchable desktop amplifier for standard PA and background music applications and is ideally suited to retail installations or where space is at a premium.

Only 1U in height and just 30cm wide, this newly-styled 60W Class-D amplifier provides both power output and features beyond the expectations of a unit so small.

Provides 3 x Mic/Line inputs with Phantom power to Input 1, as well as Telephone input and External Mute.

**Features:**

- 60W Class-D high efficiency amplifier
- 3 x Mic/line inputs
- Highly compact desktop unit
- Separate bass and treble tone controls
- 4Ω/100v line selectable
- External mute and Telephone In
- Optional 19" rack kit available (BKT-MA106)

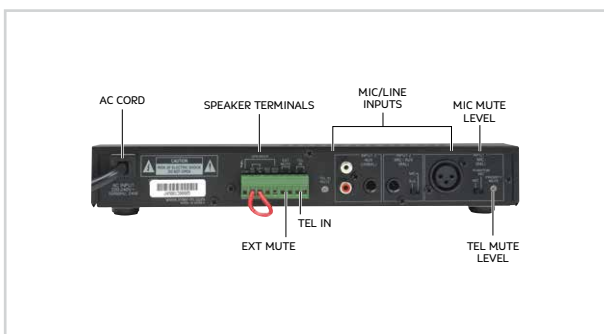

**Specifications:**

<b>Model:</b>	<b>MA106</b>
Output Power	60W RMS @ 100v/4Ω
Inputs	1 x balanced Mic (phono/XLR) complete with phantom power 1 x balanced Mic/Aux (¼" jack) 1 x unbalanced Aux (¼" jack/dual phono)
Priority	Telephone, Mic 1
Frequency Response (±3dB)	80Hz ~ 15kHz
Operating Temperature	-10°C ~ +40°C
Power Requirement	230v AC, 50 ~ 60Hz
Rack Height	1U
Dimensions	300(W) x 44(H) x 230(D) mm
Weight	2.35kg