

• **V2-5000:** Stereo Amplifier 1700W + 1700W
2ohm

The V2-5000 is a 1700W x 1700W (@ 4Ω) Professional Stereo Amplifier for high-end music installations requiring maximum performance and reliability.


The V2-5000 features new contemporary styling in a compact, space saving unit – only 2U high for 19" rack mounting.

Including a stable switch mode power supply (SMPS) for low power consumption and weight reduction, plus fan cooling and comprehensive protection facilities for over-drive, DC & short circuit; this 2 x 1700W low impedance amplifier is ideal for mid to high range music installations including pub, bar, club and AV applications.

Connections are via XLR / ¼" jack inputs and Speakon / Binding Post outputs to the rear of the unit.

Features:

- Variable fan cooling
- Comprehensive protection circuits
- Low Impedance output (2/4/8Ω)
- Bridge mono option
- Balanced inputs (XLR - 1/4" jack)
- Outputs (speakon-binding post)
- Mains powered
- 2U high, 19" rack mounting

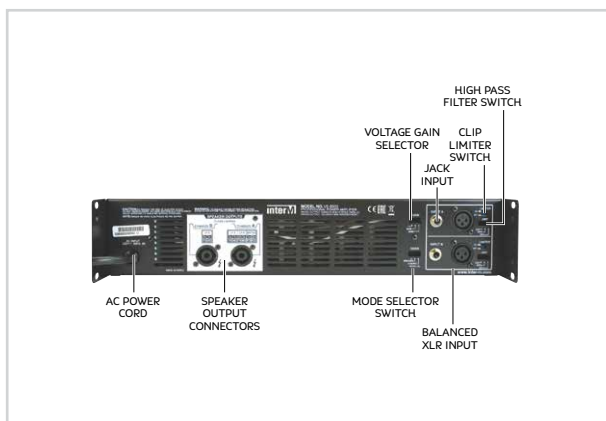

Specifications:

Model:	V2-5000
Stereo Mode	1700W @ 4Ω, 2500W @ 2Ω
Bridged Mono Mode	3400W @ 8Ω, 5000W @ 4Ω
Input Sensitivity Rated output power	1.4v @ 8Ω
Frequency Response (1W @ 8Ω)	20Hz ~ 20kHz ±0.3dB
Signal to Noise Ratio (Rated output power @ 4Ω)	106dB
Input Impedance	12kΩ balanced
Indicators	Active, Clip/Port
Protection Circuitry	Full Short Circuit, Thermal Protection, Power ON/OFF Muting, DC Output Protection
Cooling	Variable Speed Fans, front to rear air flow
Power Source	230v AC, 50Hz
Dimensions:	482(W) x 88(H) x 408(D)mm
Weight	12.5kg