

ME6 IR DuraBullet

Rugged 6MP IR bullet camera with built-in video intelligence and HDR technology




The "Stopped Vehicle" analytic triggers an alert when a vehicle pulls into a parking space for curbside pickup.



The **ME6 IR DuraBullet** from March Networks® delivers high image quality, combined with built-in IR illumination, allowing you to discern objects in the dark from over 40 meters (131 ft) away. The housing is weather-resistant and vandal-proof, rated for severe outdoor conditions and extreme temperatures.

The camera features a set of powerful video analytics, including License Plate Recognition (LPR), tripwire, intrusion detection, loitering detection, and abandoned object. Video analytics enable organizations to enhance security in both public and private spaces by detecting perimeter or area breaches, unattended objects, and atypical activity more rapidly and consistently.

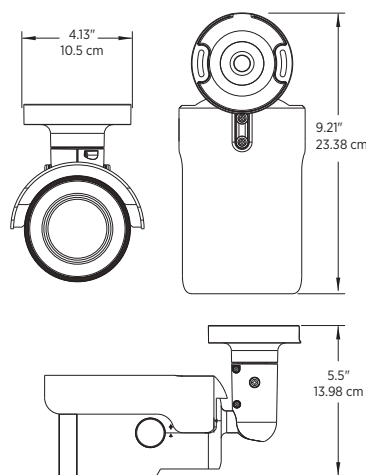

Key Benefits

▼ Built-In Video Intelligence

- **Abandoned Object** - an alarm is triggered if an object remains in one spot for too long.
- **Loitering Detection** - an alarm is triggered when people remain in an area for too long.
- **Tripwire** - an alarm is triggered when a person or object crosses the defined line.
- **Stopped Vehicle** - an alarm is triggered when a vehicle remains in an area for too long.
- **Intrusion Detection** - an alarm is triggered when people or vehicles enter a specific area.
- **Object Removal** - an alarm is triggered if an object is removed from an area.
- **License Plate Recognition** - detect and capture license plates to be used with Searchlight application.

▼ **Enhanced for Curbside pickup.** Using the stopped vehicle analytic, the camera can identify vehicles who pull into a parking space. The camera can alert the store staff of the presence and decrease waiting times for customers.

▼ **"Region of interest" encoding.** Identify parts of the scene as low or high importance, then adjust the compression levels within those zones, to save on storage.

▼ **Digital Overlay High Dynamic Range (DOL-HDR).** The camera blends the best parts of three separate exposures together to combine the most focused, well-lit, and colorful parts of the scene.

▼ **Save money on storage and bandwidth.** The low bit rate (LBR) setting reduces storage and bandwidth usage by 50% or more in most applications; streams can drop below 3Mbps at 6MP (15 fps).

▼ **See better in polluted, hazy environments.** The sensor can "see through" adverse conditions to capture details in smog, fog and smoky environments.

Thanks to embedded AI training, the camera is able to make intelligent decisions to recognize people and cars.

ME6 IR DuraBullet

CAMERA

Image Sensor	1/1.8" Progressive CMOS
Effective Pixels	6MP; 3328 (H) x 1872 (V)
Lens	3.6 – 11mm, motorized, F1.5, P-Iris
Field of View	115° H x 61.2° V (wide); 47.5° H x 27.0° V (tele)
High Dynamic Range (HDR)	120 dB
Day/Night	Automatic IR cut filter
Minimum Illumination	Color: 0.04 lux; B/W: 0.002 lux; IR On: 0.0 lux
Shutter Speed	1 to 1/500s
Camera Angle Adjustment	Pan 360°, Tilt 180°, Rotation -100° to 100°
Pan/Tilt/Zoom	3X Optical zoom, Digital PTZ via Command
White Balance	Manual/Automatic
IR Wavelength	850nm
IR Illumination Distance	40 m (131 ft)

VIDEO

Video Compression	H.265, H.264, MJPEG
Resolution	6MP (3328x1872), 5MP (3072x1728), 4MP (2688x1512), 3MP (2432x1368), 2MP 1080p (1920x1080), 1MP 720p (1280x720), XGA, SVGA, D1, VGA, CIF
Frame Rate	Up to 30fps @ 6MP; Up to 60fps @ 2MP (with Shutter WDR Off)
Streaming	Up to 4 individually configurable streams in H.265/H.264/MJPEG Configurable frame rate/bandwidth; LBR/VBR/CBR bitrate modes available
Image Settings	Iris control, backlight compensation, white balance, noise reduction, wide dynamic range, privacy mask, brightness, exposure, sharpness, contrast, saturation, hue, IR configuration, day/night threshold

AUDIO

Audio Streaming	Full Duplex
Audio Compression	G.711 PCM
Audio Input/Output	Line in/line out

NETWORK

Security	Password protection, HTTPS encryption (configuration only), IEEE 802.1X
Supported Protocols	IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, DHCP, PPPoE, QoS, ONVIF-S/G/T, SNMPv1/v2/v3

SYSTEM INTEGRATION

Video intelligence	Video motion detection, license plate recognition, active video tampering, abandoned object, loitering detection, tripwire, intrusion detection, object removal, stopped vehicle
Alarm Trigger	Video analytics, external input
Alarm Events	Video recording to local storage, external output activation

ELECTRICAL

Power	12 Vdc 1.37 A; 24 Vac 50/60 Hz 1.06 A; 48 Vdc 0.27 A (PoE 802.3af, Class 0)
Power Consumption	12 Vdc max. 15.59 W; 24 Vac max. 13.31 W; PoE max. 12.95 W

PHYSICAL

Construction	Metal housing
Dimensions (L x W x H)	234 x 105 x 140 mm (9.2 x 4.13 x 5.5 in)
Weight	1.28 kg (2.82 lb)

ENVIRONMENTAL

Operating Temperature	-55 °C to +55 °C (-67 °F to +131 °F)
Humidity	10-90% RH, non-condensing
Ingress Protection Rating	IP66
Impact Rating	IK10

USER CONNECTIONS

Alarm	1 x Alarm In, 1 x Relay Out
Audio	1 x Audio In, 1 x Audio Out
Ethernet	RJ45 10/100 Base-T
Analog Video	1 x Output

GENERAL

Local Storage	MicroSD/MicroSDHC/MicroSDXC memory card up to 1TB (not included)
LED Indicator	Power, Activity
Included Accessories	Quick Start Guide; mounting template; mounting hardware

REGULATORY

Regulatory Model	C4002A
Safety	UL 62368-1, CSA 62368-1, IEC/EN 62368-1
EMC	EN 55032, EN61000-3-2, EN61000-3-3, FCC Part 15 Subpart B, ICES-003, CISPR 32, AS/ NZS CISPR 32, EN 50130-4
Environmental	RoHS, WEEE
Compliance Marking	CE, cULus, RCM, WEEE, UKCA, NOM

MOUNTING OPTIONS



Surface Mount
(out-of-box)



Wall Mount
Back Box



Pole Adaptor
Back Box

ORDERING INFORMATION

CAMERA	
37993-101	ME6 IR DuraBullet
ACCESSORIES	
33227	Wall Mount Back Box
33226	Pole Adaptor Back Box

5-year warranty:

- Option for Advance Replacement or Repair & Return.
- No need to issue a PO prior to receiving the replacement.
- March Networks incurs all shipping costs — both ways — for Advance Replacements.