

• **CS620FH: 20W 100v 8ohm Ceiling Speaker**


The CS620FH is a 20 watt 100v line / low impedance Ceiling Speaker, designed for public address and high quality background music in applications such as restaurants, retail stores, hotels and meeting rooms, etc.

Utilising a 6.5" Coaxial 2 way speaker driver, the CS620FH loudspeaker provides high quality audio reproduction from a compact and discreet ceiling-mounted unit.

100v Tappings at 5, 10 and 20 watts.

Features:

- 6.5inch coaxial 2Way full-range ceiling speaker
- White metal front grille
- Fast fix installation
- Simple, unobtrusive compact design
- Premium grade driver
- ABS rear housing/enclosure
- 100v Tappings at 5, 10 and 20W / 8ohm low impedance via rear toggle switch

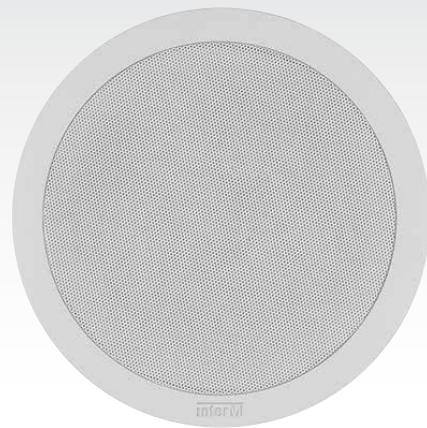

Specifications:

| Model: | CS620FH |
|---------------------------|---------------------------|
| Unit | LF: 6.5 inch, HF: 1 inch |
| Power Handling(AES) | 20W |
| Input Power 100v | 20/10/5W |
| Impedance 100v/Low | 100V: 500/1k/2kΩ, Low: 8Ω |
| Power Selection | Toggle Switch |
| Frequency Range(-10dB) | 130Hz ~ 20kHz |
| Frequency Range(-20%) | 100Hz ~ 20kHz |
| Sensitivity (1W/1m, 1kHz) | 86dB |
| Maximum SPL [Cont] | 99dB |
| Input Connector | 3P Euroblock |
| Enclosure Material | ABS (V0) |
| Enclosure Color (Front) | White |
| Grill Material | Metal Grill |
| Grill Colour | White |
| Weather Resistant | IP34 |
| Cut-Out Diameter | 200(Ø) ~ 205 mm |
| Dimensions | 230(Ø) x 168(D) mm |
| Net. Weight | 2.03kg |