



ESD 200 E – 8,5mm (1/3") colour smoke detector camera


Features

- Compact size
- Discreet surveillance through covert smoke detector casing

Technical data

Sensor	8,5mm (1/3") SONY CCD
Picture element	500 x 582 (PAL)
Horizontal resolution	340 TV lines
Sensitivity	0,3 lux / F = 1.2
Video output	1 Vp-p composite PAL, BNC
S/N ratio	Over 48 dB
Gamma correction	> 0,45
Synchronisation	internal
Back light compensation	Yes
Auto white balance	Yes
AGC	Yes
Electronic shutter	1:50 ~ 1:100.000
Number of cameras	1
Lens	f=4,3mm (further lenses upon request)
Lens mount	M12 x P 0,5
Power source	12 V DC +/- 10%, 200 mA
Ambient temperature	0°C ~ +50°C
Dimensions (diameter x H)	150 x 50 mm
Weight	135 g

Dimensions

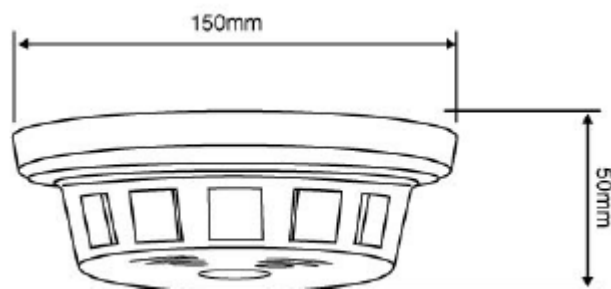

Ordering information

ESD 200 E / P-4	8,5mm (1/3") colour smoke detector camera, 340 TV lines, 4,3mm lens, 12 V DC
ESD 000 ZZ – 01	Dummy smoke detector housing
AP12A122E0	Power supply, 230 V AC / 12 V DC, 600 mA

ESD200E_db_en_rev02