



• **PU-515PL-KIT: HDBaseT LITE Extender Kit with PoE & 2-way IR up to 60m**


The CYP PU-515PL-KIT is a HDBaseT LITE Extender Kit which will transmit uncompressed HDMI, RS-232, 2-way IR control and PoE (Power-over-Ethernet) over single Cat5e/6/7 cable. All signals are transmitted consecutively over standard Ethernet cables over distances of up to 60 metres.

The PU515PLKIT features both Transmitter and Receiver units which convert the HDMI, control and PoE signals for transmission over Cat-X cable – often readily available in a building’s existing cable infrastructure. Therefore, AV installation signal transmission over distance can be provided with reduced time, disruption and cost to the installer and the end user.

This HDMI/HDBaseT LITE Extender Kit also supports both 3D signals (up to 60 metre transmission) and 4k 2k (over 40 metre transmission).

Features:

- HDMI 1.4 with 3D, 4Kx2K support, HDCP and DMI compliant
- Supports HDMI 1.4 (including HDCP) over a single CAT5e/6/7 up to 60m
- Supports HDMI 1.4 (including HDCP) over a single CAT5e/6/7 up to 60m
- Full HD resolution support (1080p@60Hz/36-bit), 3D over 60m, 4Kx2K over 40m and PC resolution support (VGA to WUXGA) over CAT5e/6 cable
- HDMI input up to 15m with 8-bit deep colour, or 10m with 12-bit deep colour
- Supports HDMI output up to 15m with 8/12-bit deep colour
- Supports two-way IR, RS-232 Control, and Power Over Ethernet (PoE)
- Supports High Definition LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio transmission

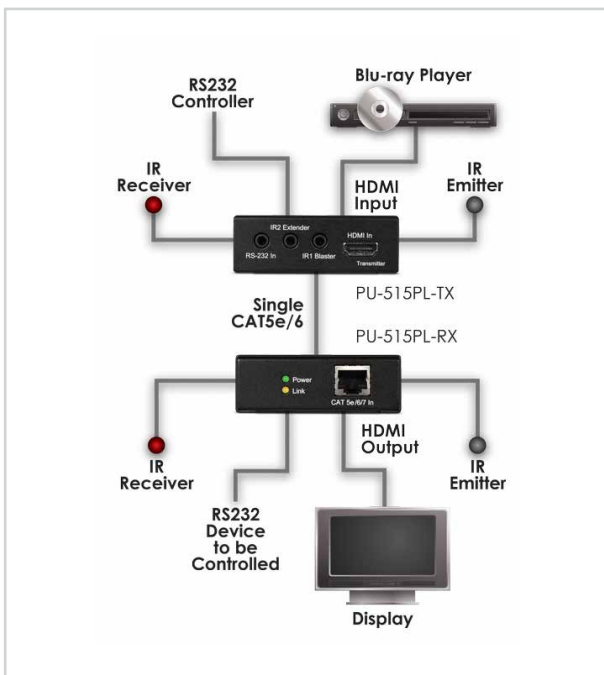

Specifications:

Model:	PU-515PL-KIT
Input:	1x HDMI [1x HDMI (TX) Uncompressed AV and Data] 1x 3.5mm Stereo mini-jack [1x (TX) Infra Red Receiver] 1x 3.5mm Stereo mini-jack [1x (TX) RS-232] 1x RJ45 [1x HDBaseT Lite (RX) HDMI & Propriety Data] 1x 3.5mm Stereo mini-jack [1x (RX) Infra Red Receiver]
Output:	1x RJ45 [1x HDBaseT Lite (TX) HDMI & Propriety Data] 1x 3.5mm Stereo mini-jack [1x (TX) Infra Red Emitter] 1x HDMI [1x HDMI (RX) Uncompressed AV and Data] 1x 3.5mm Stereo mini-jack [1x (RX) Infra Red Emitter] 1x 3.5mm Stereo mini-jack [1x (RX) RS-232]
PSU:	24v/1.25A
Dimensions:	65(W) x 70(D) x 20(H) mm
Net Weight:	0.12kg
Weight (Gross):	0.50kg